

# TORQUE MEASUREMENT AND CALIBRATION CATALOGUE



Advanced Witness Systems Ltd.

# **Advanced Witness Systems Ltd**

## **Torque Measurement & Calibration Catalogue**

### **2020**

<b>INDEX</b>	<b>PAGE</b>
<b>Torque Transducers</b>	2-25
I SERIES Transducers	2-9
A SERIES Transducers	10-17
N SERIES Transducers	18-25
<b>Transducer Displays &amp; Bench Testers</b>	26-29
Professional Transducer Display	27
Professional Torque Tool Tester	28
Professional Calibration Torque Unit	29
<b>Transducer Ancillaries</b>	30-35
Precision Torque Adapters	31-32
Multiway Transducer Switch Box	33
Intelligent Instrument Transducer Cable	34
Transducer Cables	35
<b>Calibration Rigs</b>	36-43
Torque Wrench Calibration Machine	37-38
Torque Screwdriver Calibration Machine	39-40
Universal Torque Calibration Machine	41-42
2Nm Calibration Machine	43
<b>ADMS Software</b>	44-51
Kepler 4 Combined	45-46
Kepler 4 Conformity	47-48
Kepler 4 Calibration	49-50
Kepler Software Comparison	51
<b>Wireless Telemetry Load Measurement</b>	52-62
System Overview	53-55
Wireless Telemetry Load Display	56
Wireless Telemetry Load Link	57-58
Wireless Telemetry Load Pin	59-60
Wireless Telemetry Anti 2-Block	61-62

# I SERIES TRANSDUCERS

***Our I SERIES Torque Transducers are designed to work with our Professional Transducer Display. We produce Inline, Annular and Rotary I SERIES Transducers from 1Nm to 300,000Nm. They are unique with their inbuilt instrumentation PCB to eliminate signal loss.***

<b>I SERIES</b>	<b>PAGE</b>
<b>Intelligent In-line Torque Transducers</b>	<b>3-4</b>
<b>1Nm Intelligent In-line Torque Transducers</b>	<b>5-6</b>
<b>Intelligent Annular Torque Transducers</b>	<b>7-8</b>
<b>Intelligent Rotary Torque Transducers</b>	<b>9</b>

# INTELLIGENT IN-LINE TORQUE TRANSDUCER

## DESCRIPTION

The AWS LTD Intelligent In-Line Torque Transducer range (IITT), are designed to accurately measure torque values, in a variety of industries. With optimised torque ranges, the transducer contains our Intelligent Instrumentation Package, outputting using CAN-BUS protocol to communicate with the AWS LTD Professional Transducer Display (PTD). This digital communication eliminates signal loss when using long lengths of cable, providing flexibility in communicating with other devices and systems. There is an option (using the In-line Transducer Mounting Bracket, purchased separately) to bench mount the transducer in either a vertical or horizontal position.

## SPECIFICATIONS

Model: IITT-	1011	1012	1013	1014	1015	1016	1017
Ranges:	0.1-2.5Nm	0.4-10Nm	2-50Nm	10-250Nm	20-500Nm	40-1000Nm	0.1-2.5kNm
Square Drive Size:	1/4"	1/4"	3/8"	1/2"	3/4"	3/4"	1 1/2"

**Accuracy:** Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.

**Modes:** **Run:** For Dial-type and Electronic Wrenches and Screwdrivers.

**Peak:** For Cam-type Wrenches and Screwdrivers.

**1<sup>st</sup> Peak:** For Click-type Wrenches and Screwdrivers, retains reading until manually cancelled or for 3 seconds if auto cancel option is chosen.

**Communications:** Communications via can bus. (use with the AWS PTD-1010 power & display unit).

**Power and Display:** Requires only a single D.C power supply (use with AWS PTD-1010, power and display is provided).

**Overload capability:** 125%

**Maximum mechanical overload:** 160% of range stated.

**Operating Temperature:** -10°C to +50°C.

**Connector:** Mil C 26482 series.  
6 pin. Shell size 10.

**CE:** 2014/30/EU

**EMC:** BS EN 61326-1:2013

**NATO Stock No:** IITT-1011: 6625-22-623-1635  
IITT-1012: 6625-22-623-1636  
IITT-1013: 6625-22-623-1857  
IITT-1014: 6625-22-623-1635  
IITT-1015: 6625-22-623-1641







## DIMENSIONS

Model	Dimension				Face Mounting Tapped Hole*	Square Drive	Weight (Kg)
	A	B	C	D			
IITT-1011	100	75	60	36	M5	1/4"	1.0
IITT-1012	100	75	60	36	M5	1/4"	1.0
IITT-1013	100	75	60	36	M5	3/8"	1.0
IITT-1014	115	75	60	40	M5	1/2"	1.2
IITT-1015	150	90	75	55	M5	3/4"	2.6
IITT-1016	150	90	75	55	M5	3/4"	3.3
IITT-1017	160	106	95	80	N/A	1 1/2"	3.8

\*The face mounting holes are in a square, centrally located around the square drive.

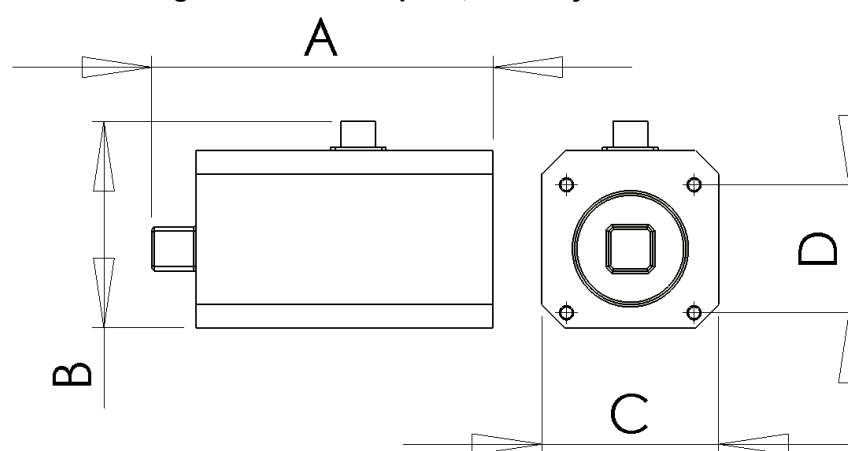

Models 1011-1016

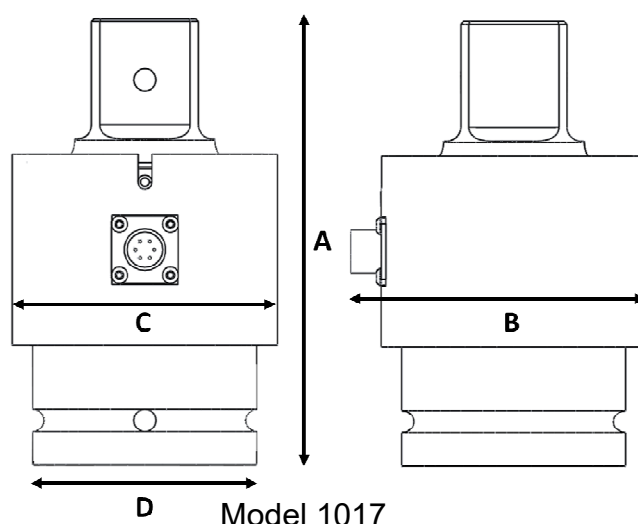

Model 1017

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont business Centre  
Beaumont Close  
Banbury  
Ox16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

### SUPPLIER INFORMATION

# 1Nm INTELLIGENT IN-LINE TORQUE TRANSDUCER

## DESCRIPTION

The AWS LTD Intelligent In-Line Torque Transducer range (IITT), are designed to accurately measure torque values, in a variety of industries.

With optimised torque ranges, the transducer contains our Intelligent Instrumentation Package, outputting using CAN-BUS protocol to communicate with the AWS LTD Professional Transducer Display (PTD). This digital communication eliminates signal loss when using long lengths of cable, providing flexibility in communicating with other devices and systems.


There is an option (using the In-line Transducer Mounting Bracket, purchased separately) to bench mount the transducer in either a vertical or horizontal position.

This transducer incorporates a mechanical overload protection stop at to prevent damage to the transducer. This transducer is either Male SQ drive to Male SQ drive or Male SQ drive to HEX drive. There are 2x M4 threaded holes in the reaction end and bottom surfaces for bolting.

## SPECIFICATIONS


Model: IITT-	1018	1018H
Ranges:	0.04-1Nm	0.04-1Nm
Drive Size:	1/4" SQ	1/4" HEX

Accuracy:	Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.
Modes:	<b>Run:</b> For Dial-type and Electronic Wrenches and Screwdrivers. <b>Peak:</b> For Cam-type Wrenches and Screwdrivers. <b>1<sup>st</sup> Peak:</b> For Click-type Wrenches and Screwdrivers, retains reading until manually cancelled or for 3 seconds if auto cancel option is chosen.
Communication:	Canbus
Overload Capacity:	120%
Power and Display:	AWS Professional Display Model 1010 or External Power Supply 10V and canbus or PC display units with appropriate software.
Maximum mechanical overload:	150% with stop
Operating Temperature:	-10°C to +50°C.
Connector:	Mil C 26482 series. 6 pin. Shell size 10.
CE:	2014/30/EU
EMC:	BS EN 61326:2007

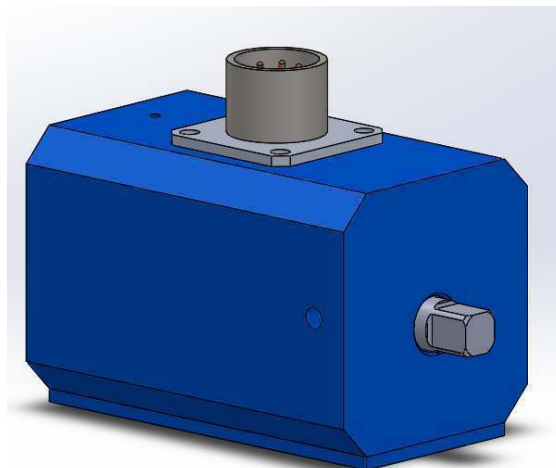

## DIMENSIONS

Model	Dimension								
	A	B	C	D	E	F	G	H	I
IITT-1018	82	55	40	25	25	10	12	16	44

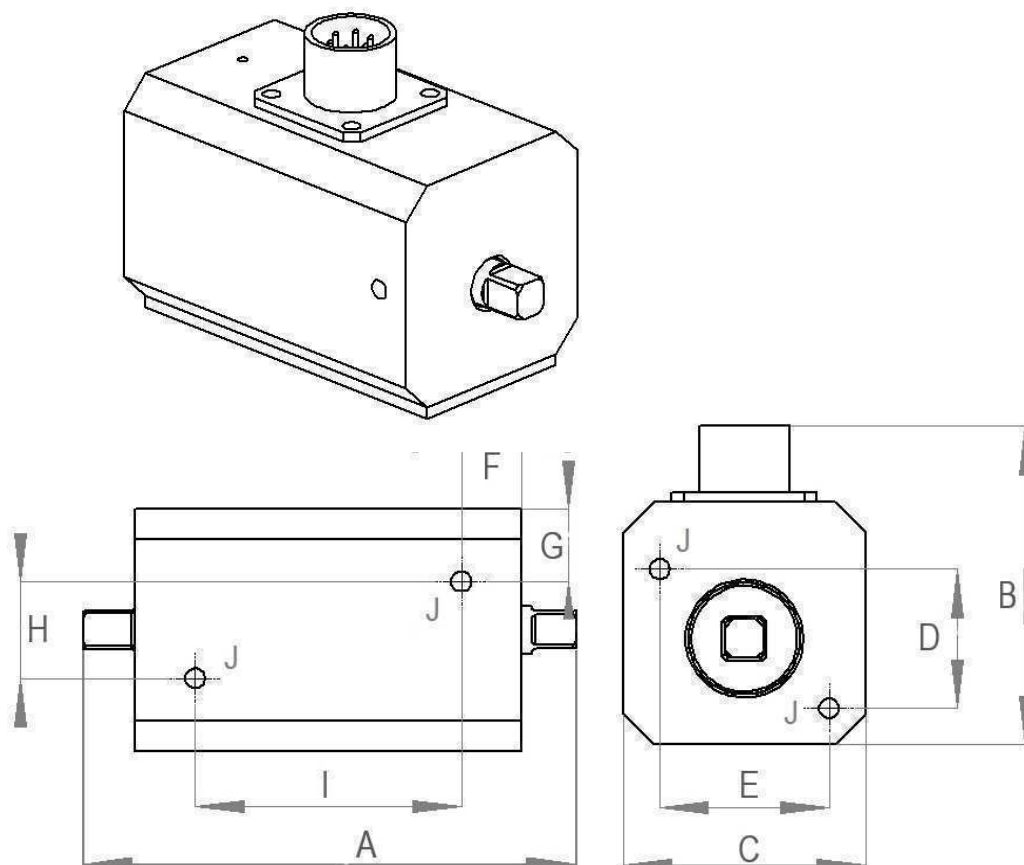

Mounting Tapped Hole "J"	Square Drive	Weight (Kg)
M4	Male 1/4"	1.0

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont business Centre  
Beaumont Close  
Banbury  
Ox16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

### SUPPLIER INFORMATION

Data was correct at time of publication.  
Catalogue Page 6

# INTELLIGENT ANNULAR TORQUE TRANSDUCER


## DESCRIPTION

The AWS Intelligent Annular Torque Transducer range (IATT), are designed to accurately measure torque values, in a variety of industries. They function either as a reaction torque transducer taking the reaction torque through the transducer, or with additional drive plates, attached to the flanges, to convert them to direct drive inline transducers. With optimised torque ranges, the transducer contains our Intelligent Instrumentation Package, outputting using CAN-BUS protocol to communicate with the AWS Professional Transducer Display (PTD). This digital communication eliminates signal loss when using long lengths of cable, providing flexibility in communicating with other devices and systems.

## SPECIFICATIONS

Model: IATT-	1039	1031	1032	1033	1034	1035	1046	1036	1037
Ranges (kNm):	3.5	5	10	20	50	100	120	200	300



Accuracy:	Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.
Modes:	<b>Run:</b> For Dial-type and Electronic Wrenches and Screwdrivers. <b>Peak:</b> For Cam-type Wrenches and Screwdrivers. <b>1<sup>st</sup> Peak:</b> For Click-type Wrenches and Screwdrivers, retains reading until manually cancelled or for 3 seconds if auto cancel option is chosen.
Communications:	Communications via CAN-BUS. (When used with the AWS PTD that converts and displays the signals, showing mode selected, transducer details and output in RS232 serial form).
Power and Display:	Requires only a single D.C. power supply (when used with AWS PTD, power and display is provided).
Overload capability:	125%
Maximum mechanical overload:	160% of range stated.
Operating Temperature:	-10°C to +50°C.
Temperature coefficient:	On Zero: 0.01% per °C On Span: 0.03% per °C
Connector:	MIL C 26482 series. 6 pin. Shell size 10.
CE:	2014/30/EU
EMC:	BS EN 61326-1:2013

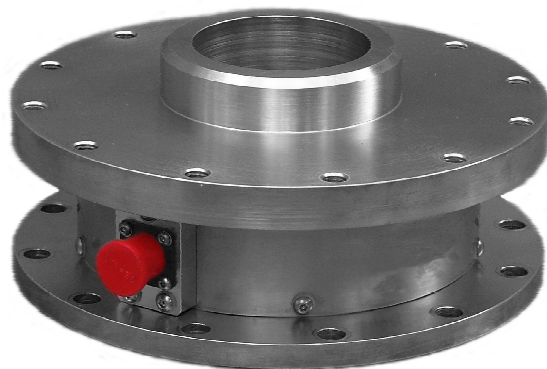



## DIMENSIONS

Dim mm	2030	2031	2032	2033	2034	2035	2046	2036	2037
A	39	55	55	70	125	125	125	205	205
B	69	76	76	95	219.92	219.92	219.92	239.92	239.92
C	84.1	177.8	177.8	212	315	315	315	520	520
D	119	184	184	212	315	315	315	520	520
E	99.06	152.4	152.4	195	290	290	290	492	492
F	M5X0.8	M10X1.5	M10X1.5	M10X1.5	M16X2.0	M16X2.0	M16X2.0	M16X2.0	M16X2.0
G	79	77	77	97	126	126	126	130	130
H	84.5	90	90	76	110	110	110	146	146
I	92.5	-	-	-	-	-	-	-	-
J	59	-	-	-	-	-	-	-	-
No. Bolts	24	24	24	24	40	40	40	68	68




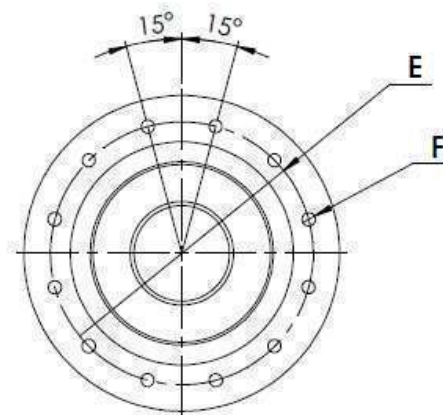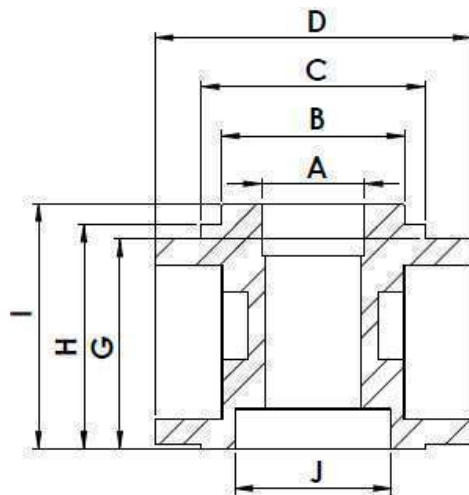


**1039 ONLY**

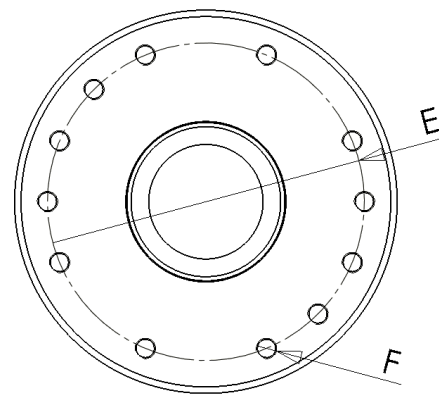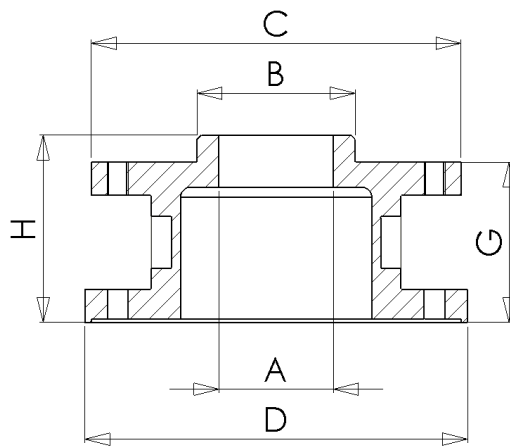


**1031 AND ABOVE**

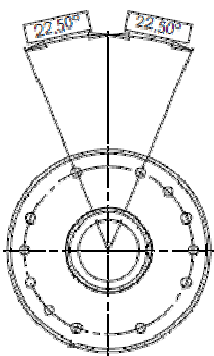


**2031 & 2032**

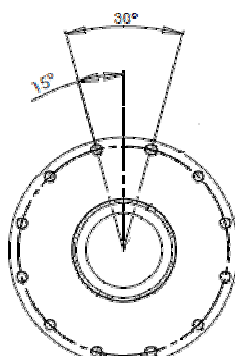

**2033**



**2034, 2035 & 2046**

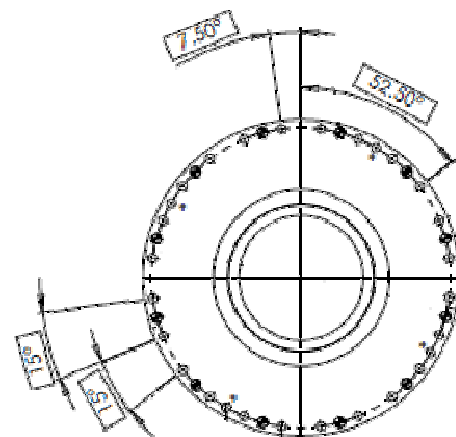

**2036 & 2037**

Advanced Witness Systems Ltd © 2020

**MANUFACTURER INFORMATION**

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

**SUPPLIER INFORMATION**

# INTELLIGENT ROTARY TORQUE TRANSDUCER


## DESCRIPTION

The AWS LTD Intelligent Rotary Torque Transducer range (IRTT), are designed to accurately measure torque values in a rotating shaft, in a variety of industries. With optimised torque ranges, the transducer contains our Intelligent Instrumentation Package, outputting using CAN-BUS protocol to communicate with the AWS LTD Professional Transducer Display (PTD). This digital communication eliminates signal loss when using long lengths of cable, providing flexibility in communicating with other devices and systems. The IRTT can be produced with different adapters depending on its use including square (standard) and keyway (option).

## SPECIFICATIONS

Model: IRTT-	1042	1043	1044	1045
Ranges:	2-50Nm	10-250Nm	20-500Nm	40-1000Nm
Square Drive Size:	3/8"	1/2"	3/4"	3/4"

Accuracy:	Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.
Modes:	<b>Run:</b> For Dial-type and Electronic Wrenches and Screwdrivers. <b>Peak:</b> For Cam-type Wrenches and Screwdrivers. <b>1<sup>st</sup> Peak:</b> For Click-type Wrenches and Screwdrivers, retains reading until manually cancelled or for 3 seconds if auto cancel option is chosen.
Communications:	Communications via can bus. (When used with the AWS PTD-1010 that converts and displays the signals, shows mode selected, transducer details and output in RS232serial form).
Power and Display:	Requires only a single D.C power supply (used with AWS PTD-1010, power and display is provided).
Adapter:	The IRT can be produced with shaft ends suitable to its intended function.
Speed:	Standard 20,000 RPM
Overload capability:	125%
Maximum mechanical overload:	160% of range stated.
Operating Temperature range:	-10°C to +50°C.
Connector:	Mil C 26482 series. 6 pin. Shell size 10.
CE:	2014/30/EU
EMC:	BS EN 61326:2007



Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont business Centre  
Beaumont Close  
Banbury  
Ox16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION

# **^ SERIES TRANSDUCERS**

*Our A SERIES Torque Transducers are designed to work with any existing analogue torque system.*

*We produce Inline, Annular and Rotary A SERIES Transducers from 1Nm to 300,000Nm.*

<b>A SERIES</b>	<b>PAGE</b>
<b>Analogue In-line Torque Transducers</b>	<b>11-12</b>
<b>1Nm Analogue In-line Torque Transducers</b>	<b>13-14</b>
<b>Analogue Annular Torque Transducers</b>	<b>15-16</b>
<b>Analogue Rotary Torque Transducers</b>	<b>17</b>

# ANALOGUE IN-LINE TORQUE TRANSDUCER

## DESCRIPTION

The AWS LTD Analogue In-Line Torque Transducer range (AITT), are designed to accurately measure torque values, in a variety of industries.

With optimised torque ranges, the transducer uses a standard analogue connection through a male MIL C connector, from a full active Wheatstone bridge, outputting a mV reading.

There is an option (using the In-line Transducer Mounting Bracket, purchased separately) to bench mount the transducer in either a vertical or horizontal position.

## SPECIFICATIONS

Model: AITT-	2011	2012	2013	2014	2015	2016
Ranges:	0.12-3Nm	0.4-10Nm	2-50Nm	10-250Nm	20-500Nm	40-1000Nm
Square Drive Size:	1/4"	1/4"	3/8"	1/2"	3/4"	3/4"

Accuracy: Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.

Signal output  
2 mV/V  
Strain gauge

Communication: mV analogue output

Bridge Impedance 350  $\Omega$

MAX Voltage and Current Requirement

10V DC 30mA

Power and Display: Requires a stable DC power supply and mV reading meter.

Overload capability: 125%

Maximum mechanical overload: 160% of range stated.

Operating Temperature: -10°C to +50°C.

Connector: Mil C 26482 series.  
6 pin. Shell size 10.

CE: 2014/30/EU

EMC: BS EN 61326:2007






## DIMENSIONS

Model	Dimension				Face Mounting Tapped Hole*	Square Drive	Weight (Kg)
	A	B	C	D			
AITT-2011	100	75	60	36	M5	1/4"	1.0
AITT-2012	100	75	60	36	M5	1/4"	1.0
AITT-2013	100	75	60	36	M5	3/8"	1.0
AITT-2014	115	75	60	40	M5	1/2"	1.2
AITT-2015	150	90	75	55	M5	3/4"	2.6
AITT-2016	150	90	75	55	M5	3/4"	4.5

\*The face mounting holes are in a square, centrally located around the square drive.

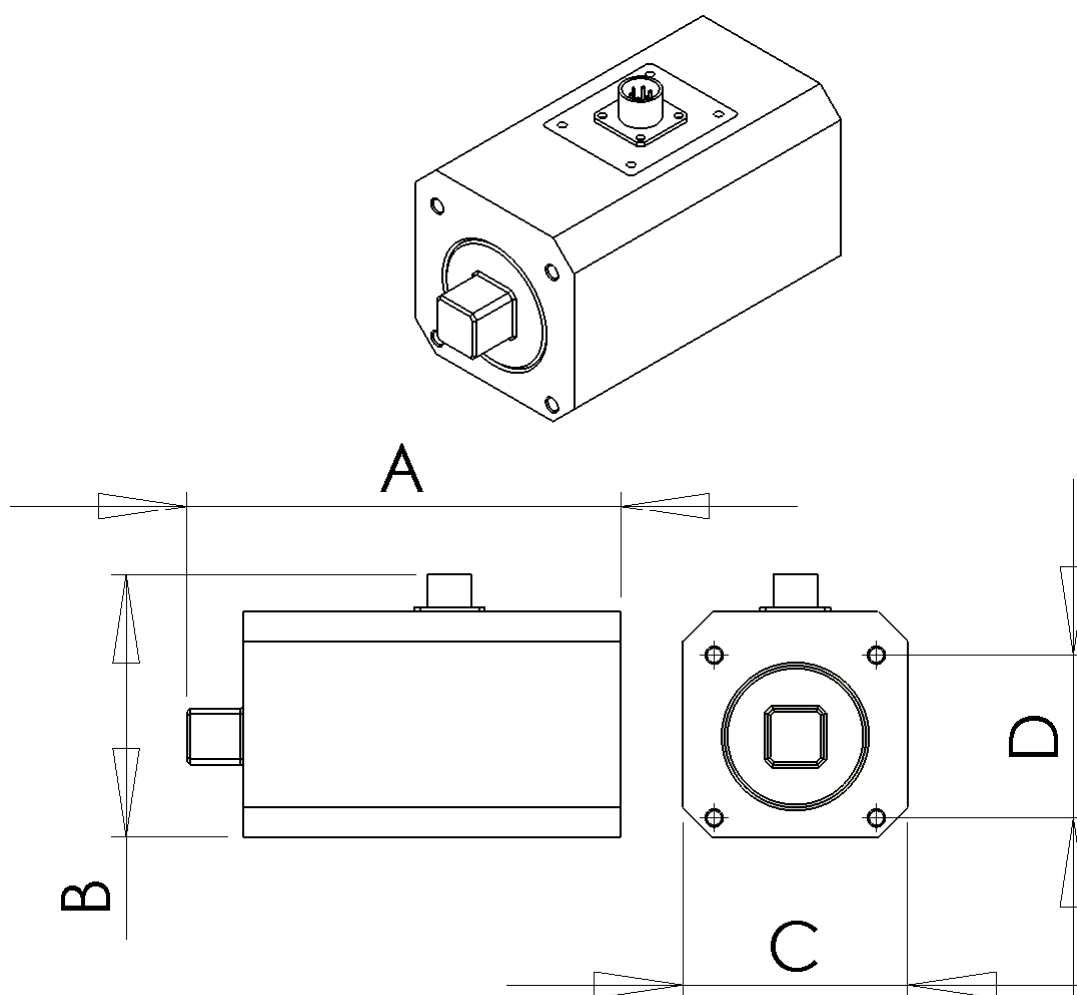

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont business Centre  
Beaumont Close  
Banbury  
Ox16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

### SUPPLIER INFORMATION

Data was correct at time of publication.  
Catalogue Page 12

# 1Nm ANALOGUE IN-LINE TORQUE TRANSDUCER

## DESCRIPTION

The AWS LTD Analogue In-Line Torque Transducer range (AITT), are designed to accurately measure torque values, in a variety of industries.

With optimized torque ranges, the transducer uses a standard analogue connection through a male MIL C connector, from a full active Wheatstone bridge, outputting a mV/V reading.

There is an option (using the In-line Transducer Mounting Bracket, purchased separately) to bench mount the transducer in either a vertical or horizontal position. The vertical position allows it to be mounted in ISO torque wrench calibration machines.

This transducer incorporates a mechanical overload protection stop to prevent damage to the transducer. This transducer is can either be Male SQ drive to Male SQ drive or Male SQ to Male HEX drive. There are 2x M4 threaded holes in the reaction end and bottom surfaces for bolting.

## SPECIFICATIONS

Model: AITT-	2018	2018H
Ranges:	0.04-1Nm	0.04-1Nm
Drive Size:	1/4"	1/4" HEX

Accuracy: Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.

Signal output: 2 mV/V  
Strain gauge

Communication: mV

Overload Capacity: 120%

Bridge Impedance: 350  $\Omega$

MAX voltage and current requirement: 10V DC 30mA

Power and Display: Dedicated mV/V display and power supply.

Maximum mechanical overload: 150% with stop

Operating Temperature: -10°C to +50°C.

Connector: Mil C 26482 series.  
6 pin. Shell size 10.


CE: 2014/30/EU

EMC: BS EN 61326:2007



## DIMENSIONS

Model	Dimension								
	A	B	C	D	E	F	G	H	I
AITT-2018	82	53	40	25	25	10	12	16	44

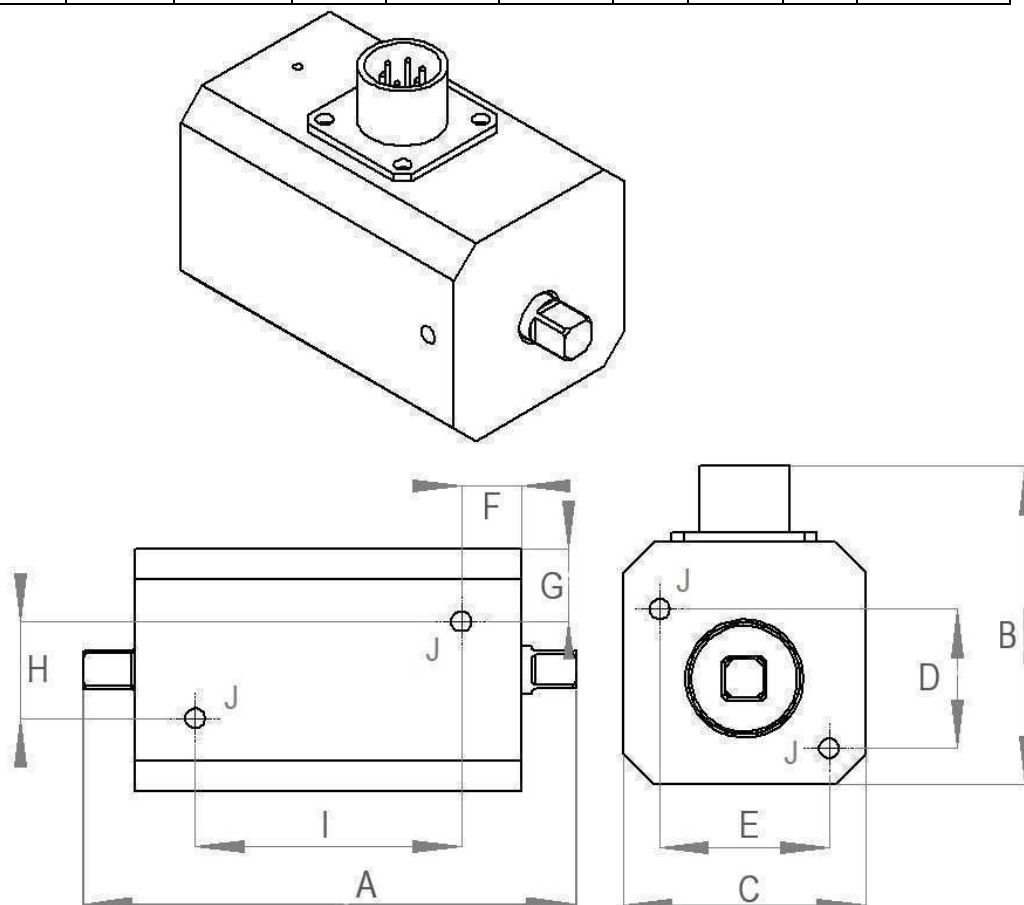

Mounting Tapped Hole "J"	Square Drive	Weight (Kg)
M4	Male 1/4"	1.0

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont business Centre  
Beaumont Close  
Banbury  
Ox16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

### SUPPLIER INFORMATION

Data was correct at time of publication.  
Catalogue Page 14

# ANALOGUE ANNULAR TORQUE TRANSDUCER

## DESCRIPTION


The AWS Analogue Annular Torque Transducer range (AATT), are designed to accurately measure torque values, in a variety of industries. They function either as a reaction torque transducer taking the reaction torque through the transducer, or with additional drive plates, attached to the flanges, convert them to direct drive inline transducers.

With optimised torque ranges, the transducer uses a standard analogue connection through a male MIL C connector, from a full active Wheatstone bridge, outputting a mV reading.

## SPECIFICATIONS

Model: AATT-	2030	2031	2032	2033	2034	2035	2046	2036	2037
Ranges (kNm):	3.5	5	10	20	50	100	120	200	300



Accuracy:	Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.
Signal Output	2mv/v
	Strain gauged bridge
Power and Display:	Requires a stable DC power supply and mV reading meter.
Overload capability:	125%
Bridge Impedance	350Ω
Max Voltage and Current Requirement	10V 30mA DC
Maximum mechanical overload:	160% of range stated.
Operating Temperature:	-10°C to +50°C.
Temperature coefficient:	On Zero: 0.01% per °C On Span: 0.03% per °C
Connector:	Mil C 26482 series. 6 pin. Shell size 10.
CE:	2014/30/EU
EMC:	BS EN 61326:2013

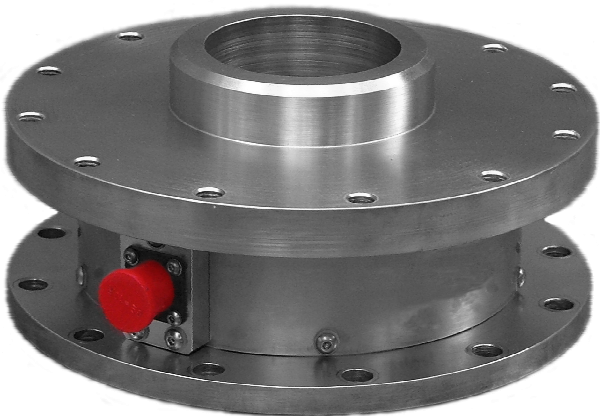



## DIMENSIONS

Dim mm	2030	2031	2032	2033	2034	2035	2046	2036	2037
A	39	55	55	70	125	125	125	205	205
B	69	76	76	95	219.92	219.92	219.92	239.92	239.92
C	84.1	177.8	177.8	212	315	315	315	520	520
D	119	184	184	212	315	315	315	520	520
E	99.06	152.4	152.4	195	290	290	290	492	492
F	M5X0.8	M10X1.5	M10X1.5	M10X1.5	M16X2.0	M16X2.0	M16X2.0	M16X2.0	M16X2.0
G	79	77	77	97	126	126	126	130	130
H	84.5	90	90	76	110	110	110	146	146
I	92.5	-	-	-	-	-	-	-	-
J	59	-	-	-	-	-	-	-	-
No. Bolts	24	24	24	24	40	40	40	68	68




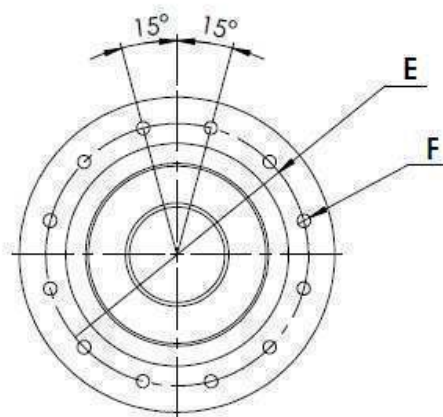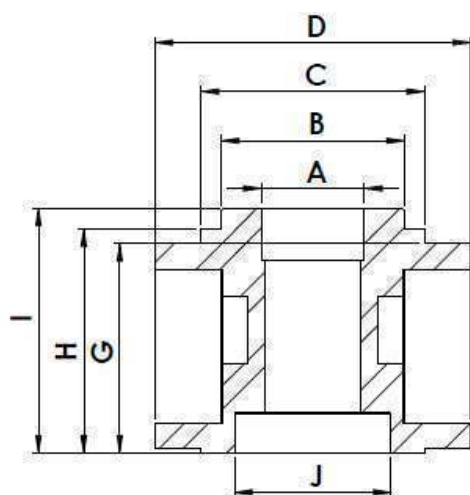


**2030 ONLY**

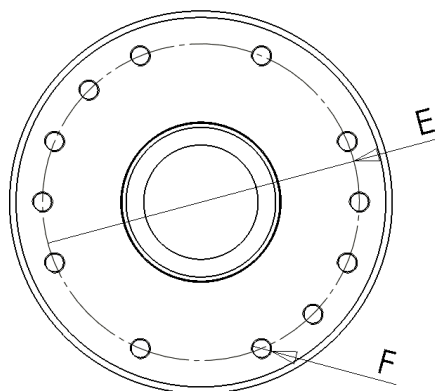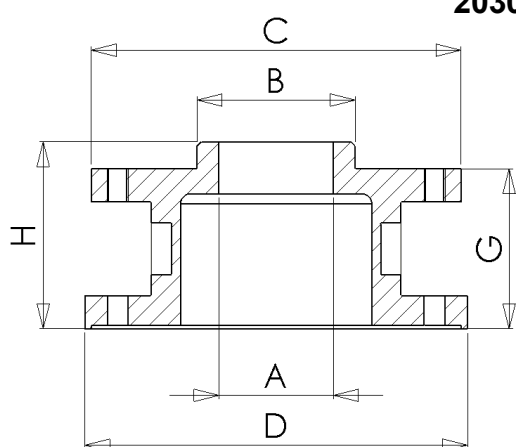


**2031 AND ABOVE**

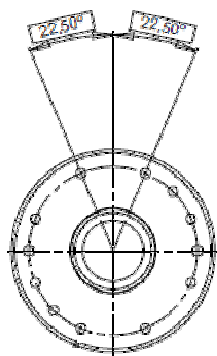


**2031 & 2032**

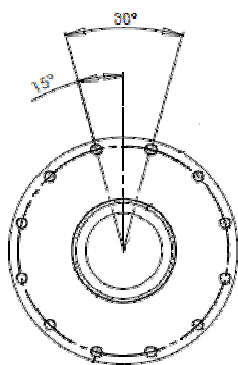

**2033**



**2034, 2035 & 2046**

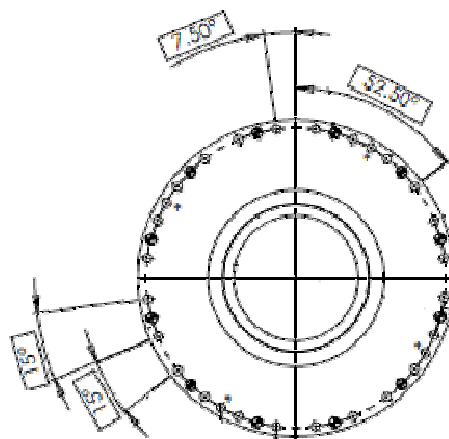

**2036 & 2037**

Advanced Witness Systems Ltd © 2020

**MANUFACTURER INFORMATION**

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

**SUPPLIER INFORMATION**

# ANALOGUE ROTARY TORQUE TRANSDUCER


## DESCRIPTION

The AWS LTD Analogue Rotary Torque Transducer range (ARTT), are designed to accurately measure torque values in a rotating shaft, in a variety of industries. With optimised torque ranges, the transducer uses a standard analogue connection through a male MIL C connector, from a full active Wheatstone bridge, outputting a mV reading. The ARTT can be produced with different adapters depending on its use including square (standard) and keyway (option).

## SPECIFICATIONS

Model: ARTT-	2041	2042	2043	2044	2045
Ranges:	0.4-10Nm	2-50Nm	10-250Nm	20-500Nm	40-1000Nm
Square Drive Size:	1/4"	3/8"	1/2"	3/4"	3/4"

Accuracy:	Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.
Signal Output:	Analogue mV
Communications:	N/A
Power and Display:	Requires a stable DC power supply and mV reading meter.
Adapter:	The IRT can be produced with shaft ends suitable to its indented function.
Speed:	Standard 20,000 RPM
Overload capability:	125%
Bridge Impedance:	350 Ω
Max Voltage and Current Requirement:	10V DC 30mA
Maximum mechanical overload:	160% of range stated.
Operating Temperature:	-10°C to +50°C.
Connector:	Mil C 26482 series. 6 pin. Shell size 10.
CE:	2014/30/EU
EMC:	BS EN 61326:2007

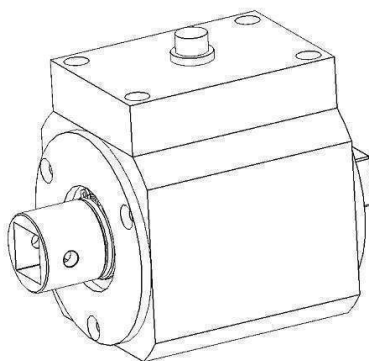

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont business Centre  
Beaumont Close  
Banbury  
Ox16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION

# N SERIES TRANSDUCERS

*Our N SERIES Torque Transducers are designed to work with other manufacturer's intelligent display systems.*

*We produce Inline, Annular and Rotary N SERIES Transducers from 1Nm to 300,000Nm.*

N SERIES	PAGE
N-Type In-line Torque Transducers	19-20
1Nm N-Type In-line Torque Transducers	21-22
N-Type Annular Torque Transducers	23-24
N-Type Rotary Torque Transducers	25

# N-TYPE IN-LINE TORQUE TRANSDUCER

## DESCRIPTION

The AWS LTD N-type In-Line Torque Transducer range (NITT), are designed to accurately measure torque values, in a variety of industries.

With optimised torque ranges, the transducer outputs a mV signal proportional to the supply voltage and torque. The transducer contains a memory chip in which a small selection of parameters, including serial number, model number, and calibration value, are held, compatible for setting some manufacturers display units.

There is an option (using the In-line Transducer Mounting Bracket, purchased separately) to bench mount the transducer in either a vertical or horizontal position.

## SPECIFICATIONS

Model: NITT-	3011	3012	3013	3014	3015	3016
Ranges:	0.1-2.5Nm	0.4-10Nm	2-50Nm	10-250Nm	20-500Nm	40-1000Nm
Square Drive Size:	1/4"	1/4"	3/8"	1/2"	3/4"	3/4"

Accuracy:	Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.
Signal Output:	2mV/V
Communications:	Not Applicable
Bridge Impedance:	350Ω
Max Voltage and Current Requirements:	10V DC 30mA
Power and Display:	Requires DC power supply and Dedicated mV meter
Overload capability:	125%
Maximum mechanical overload:	160% of range stated.
Operating Temperature:	-10°C to +50°C.
Connector:	Mil C 26482 series. 6 pin. Shell size 10.
CE:	2014/30/EU
EMC:	BS EN 61326:2007






## DIMENSIONS

Model	Dimension				Face Mounting Tapped Hole*	Square Drive	Weight (Kg)
	A	B	C	D			
NITT-3011	100	75	60	36	M5	1/4"	1.0
NITT-3012	100	75	60	36	M5	1/4"	1.0
NITT-3013	100	75	60	36	M5	3/8"	1.0
NITT-3014	115	75	60	40	M5	1/2"	1.2
NITT-3015	150	90	75	55	M6	3/4"	2.6
NITT-3016	150	90	75	55	M6	3/4"	4.5

\*The face mounting holes are in a square, centrally located around the square drive.

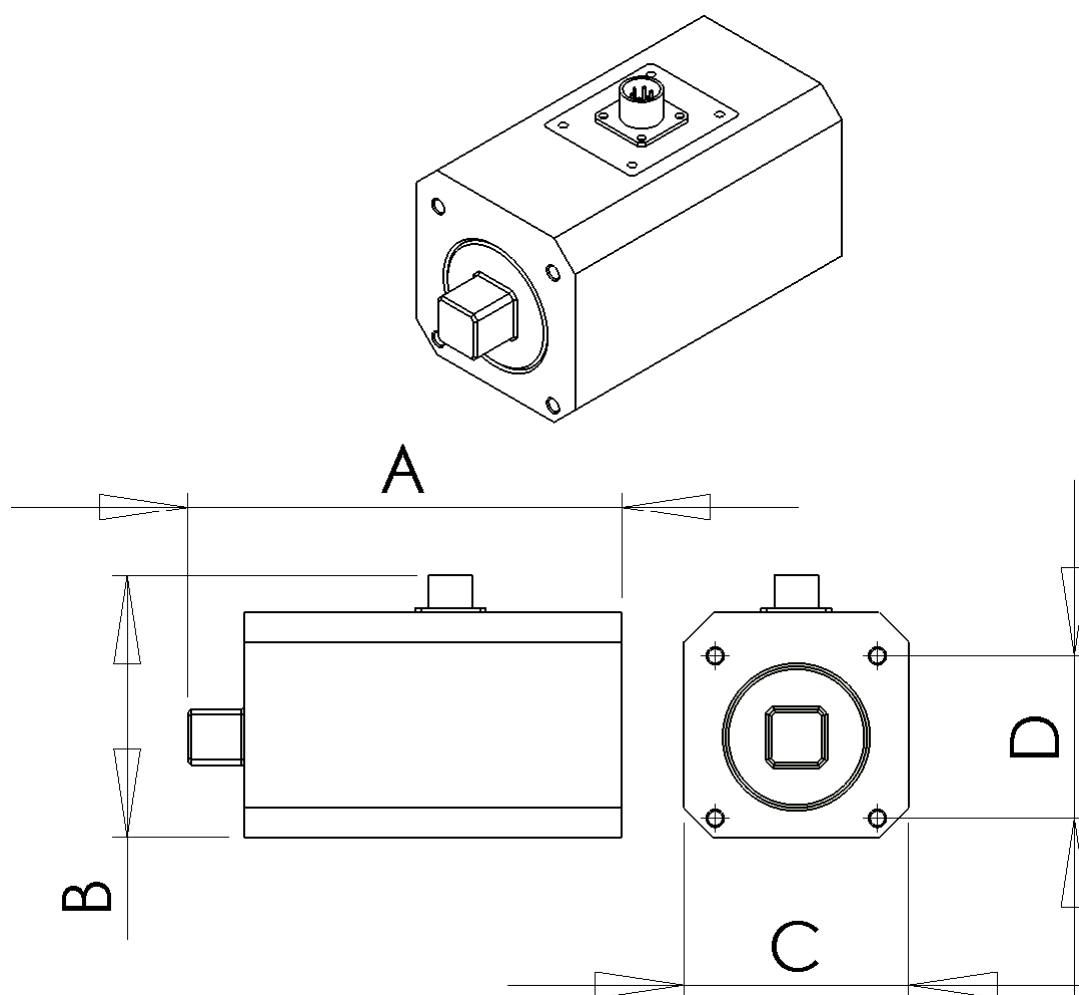

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont business Centre  
Beaumont Close  
Banbury  
Ox16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

### SUPPLIER INFORMATION

# 1Nm N-TYPE IN-LINE TORQUE TRANSDUCER

## DESCRIPTION

The AWS LTD N-Type In-Line Torque Transducer range (NITT), are designed to accurately measure torque values, in a variety of industries. With optimized torque ranges, the transducer uses a standard analogue connection through a male MIL C connector, from a full active Wheatstone bridge, outputting a mV/V reading.

The transducer contains a memory chip in which a small selection of parameters, including serial number, model number, and calibration value, are held, compatible for setting some manufacturers display units.


There is an option (using the In-line Transducer Mounting Bracket, purchased separately) to bench mount the transducer in either a vertical or horizontal position. The vertical position allows it to be mounted in ISO torque wrench calibration machines.

This transducer incorporates a mechanical overload protection stop at 110% of full scale to prevent damage to the transducer. This transducer is can either be Male SQ drive to Male SQ drive or Male SQ to Male HEX drive. There are 2x M4 threaded holes in the reaction end and bottom surface for bolting.

## SPECIFICATIONS


Model: NITT-	2018	2018H
Ranges:	0.04-1Nm	0.04-1Nm
Drive Size:	1/4"	1/4" HEX

Accuracy:	Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.
Signal output	2 mV/V Strain gauge
Communication:	Not Applicable
Overload	120%
Capacity:	
Bridge Impedance	350 $\Omega$
MAX voltage requirement	10V DC 30mA
Power and Display:	Requires DC power supply and Dedicated mV meter
Maximum mechanical overload:	150% with stop
Operating Temperature:	-10°C to +50°C.
Connector:	Mil C 26482 series. 6 pin. Shell size 10.
CE:	2014/30/EU
EMC:	BS EN 61326:2007

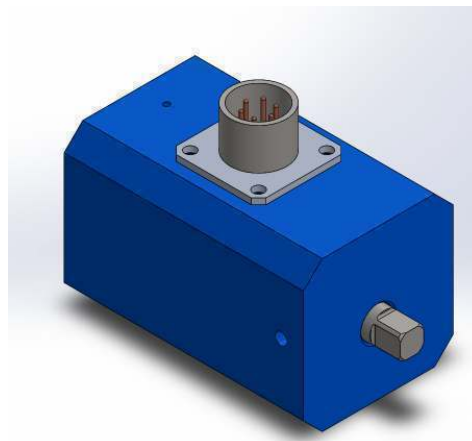

## DIMENSIONS

Model	Dimension								
	A	B	C	D	E	F	G	H	I
NITT-2018	82	53	40	25	25	10	12	16	44

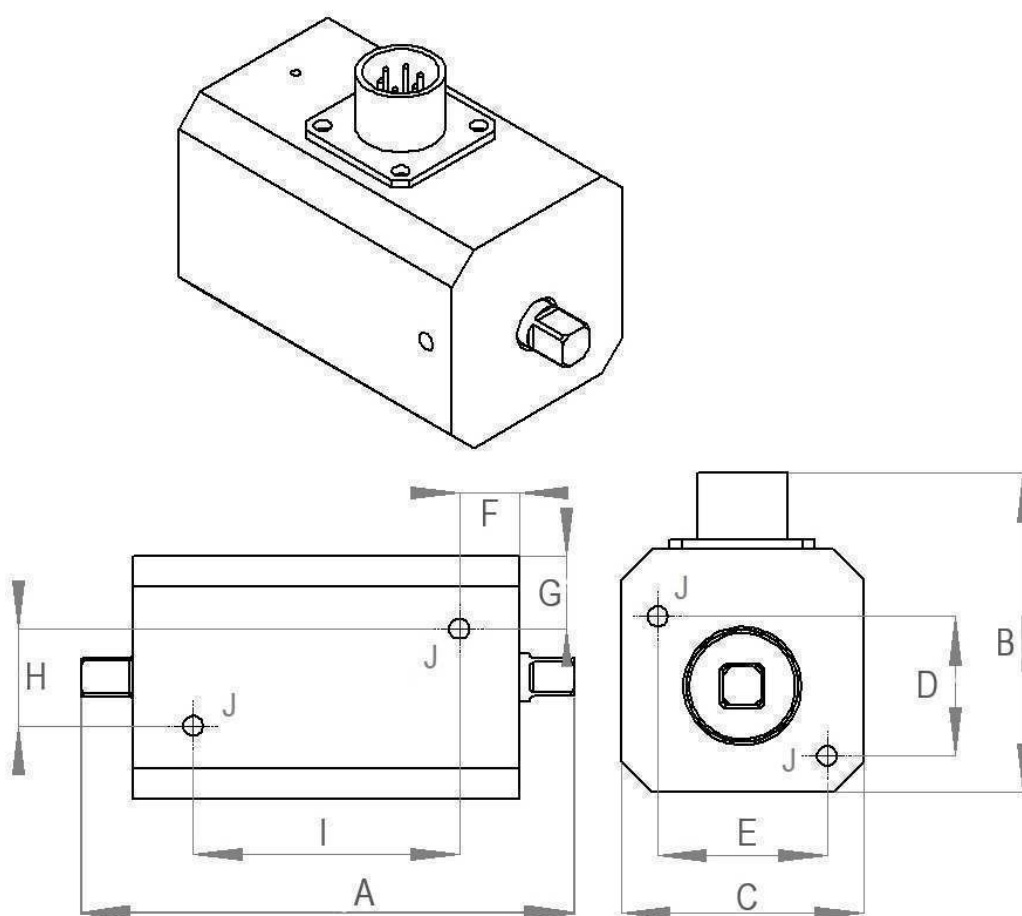

Mounting Tapped Hole "J"	Square Drive	Weight (Kg)
M4	Male 1/4"	1.0

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont business Centre  
Beaumont Close  
Banbury  
Ox16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION

Data was correct at time of publication.  
Catalogue Page 22

# N-TYPE ANNULAR TRANSDUCER

## DESCRIPTION


The AWS N-type Annular Torque Transducer range (NATT), are designed to accurately measure torque values, in a variety of industries. They function either as a reaction torque transducer taking the reaction torque through the transducer, or with additional drive plates, attached to the flanges, convert them to direct drive inline transducers.

With optimised torque ranges, the transducer outputs a mV signal proportional to the supply voltage and torque. The transducer contains a memory chip in which a small selection of parameters, including serial number, model number, and calibration value, are held, compatible for setting some manufacturers display units.

## SPECIFICATIONS



Model: NATT-	3030	3031	3032	3033	3034	3035	3046	3036	3037
Ranges (kNm):	3.5	5	10	20	50	100	120	200	300

Accuracy:	Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.
Signal Output	2mv/v Strain gauged bridge
Power and Display:	Requires DC power supply and Dedicated mV meter
Overload capability:	125%
Bridge Impedance:	350Ω
Max Voltage and Current Requirement:	10V 30mA DC
Maximum mechanical overload:	160% of range stated.
Operating Temperature:	-10°C to +50°C.
Temperature coefficient:	On Zero: 0.01% per °C On Span: 0.03% per °C
Connector:	Mil C 26482 series. 6 pin. Shell size 10.
CE:	2014/30/EU
EMC:	BS EN 61326:2013


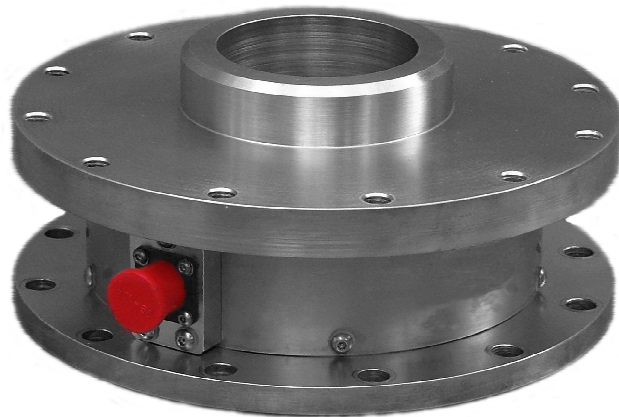


## DIMENSIONS


Dim mm	2030	2031	2032	2033	2034	2035	2046	2036	2037
A	39	55	55	70	125	125	125	205	205
B	69	76	76	95	219.92	219.92	219.92	239.92	239.92
C	84.1	177.8	177.8	212	315	315	315	520	520
D	119	184	184	212	315	315	315	520	520
E	99.06	152.4	152.4	195	290	290	290	492	492
F	M5X0.8	M10X1.5	M10X1.5	M10X1.5	M16X2.0	M16X2.0	M16X2.0	M16X2.0	M16X2.0
G	79	77	77	97	126	126	126	130	130
H	84.5	90	90	76	110	110	110	146	146
I	92.5	-	-	-	-	-	-	-	-
J	59	-	-	-	-	-	-	-	-
No. Bolts	24	24	24	24	40	40	40	68	68

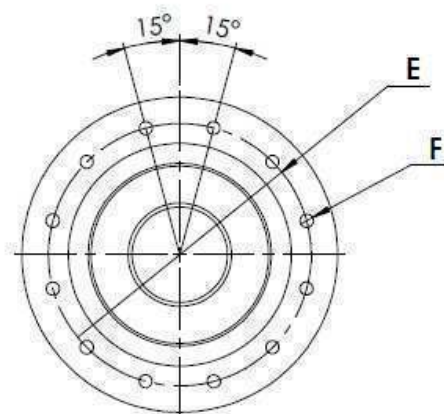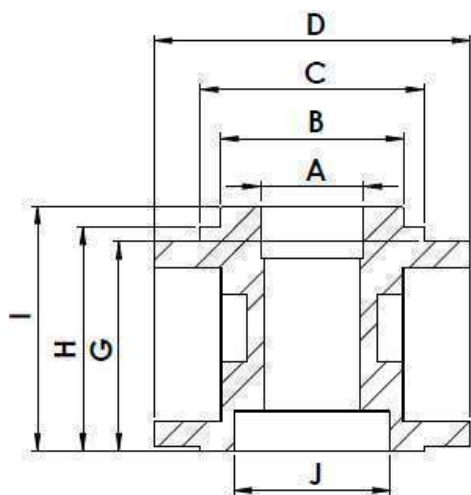


**3030 ONLY**

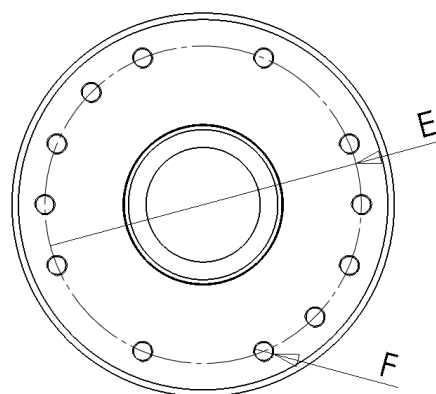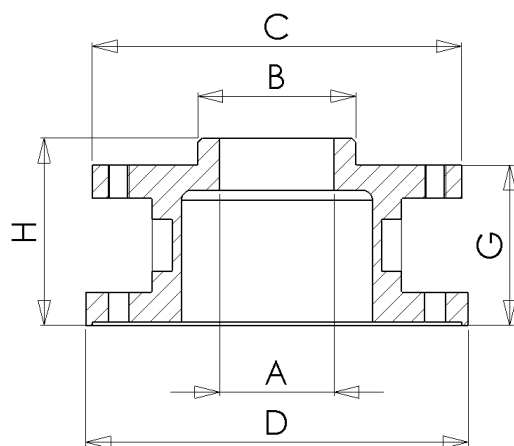


**3031 AND ABOVE**

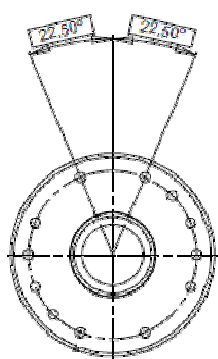


**3031 & 3032**

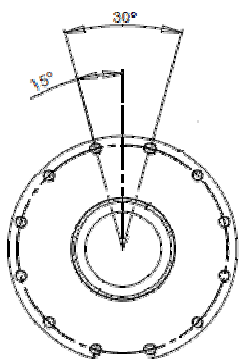

**3033**



**3034 & 3035**

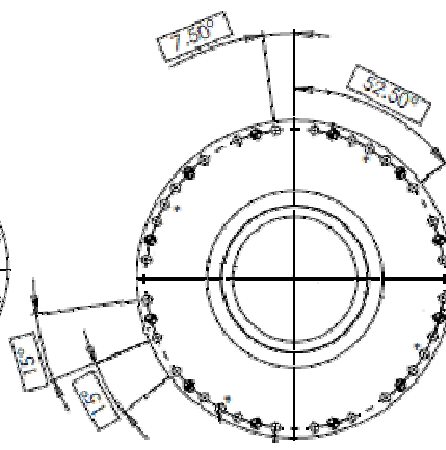

**3036 & 3037**

Advanced Witness Systems Ltd © 2020

**MANUFACTURER INFORMATION**

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

**SUPPLIER INFORMATION**

# N-TYPE ROTARY TORQUE TRANSDUCER


## DESCRIPTION

The AWS LTD N-type Rotary Torque Transducer range (NRTT), are designed to accurately measure torque values in a rotating shaft, in a variety of industries. With optimised torque ranges, the transducer outputs a mV signal proportional to the supply voltage and torque. The transducer contains a memory chip in which a small selection of parameters, including serial number, model number, and calibration value, are held, compatible for setting some manufacturers display units. The NRTT can be produced with different adapters depending on its use including square (standard) and keyway (option).

## SPECIFICATIONS

Model: NRTT-	3041	3042	3043	3044	3045
Ranges:	0.4-10Nm	2-50Nm	10-250Nm	20-500Nm	40-1000Nm
Square Drive Size:	1/4"	3/8"	1/2"	3/4"	3/4"
Keyway Size:	Multiple sizes	Multiple sizes	Multiple sizes	Multiple sizes	Multiple sizes

Accuracy:	Better than 0.1% of reading from 10 to 100% of rated output. See calibration certificate for full results.
Signal Output:	2mV/V
Communications:	Not Applicable
Bridge Impedance:	350Ω
Max Voltage and Current Requirement:	10V DC 30mA
Power and Display:	Requires DC power supply and Dedicated mV meter
Adapter:	The IRT can be produced with shaft ends suitable to its indented function.
Speed:	Standard 20,000 RPM
Overload capability:	125%
Maximum mechanical overload:	160% of range stated.
Operating Temperature:	-10°C to +50°C.
Connector:	Mil C 26482 series. 6 pin. Shell size 10.
CE:	2014/30/EU
EMC:	BS EN 61326:2007

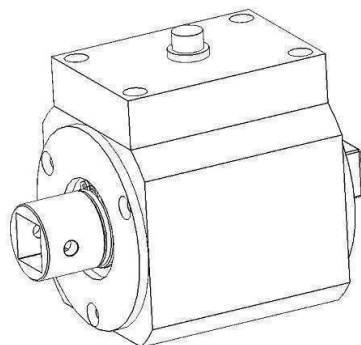

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION



# DISPLAYS & BENCH TESTERS

*Our Professional Transducer Display and Bench Testers use our unique inbuilt instrumentation PCBs to eliminate signal loss. Whether using one of our Intelligent Transducers, or a Bench Tester, the models accommodate your torque and budget requirements.*

<b>Displays &amp; Bench Testers</b>	<b>PAGE</b>
<b>Professional Transducer Display</b>	<b>27</b>
<b>Professional Torque Tool Tester</b>	<b>28</b>
<b>Professional Calibration Torque Unit</b>	<b>29</b>

# PROFESSIONAL TRANSDUCER DISPLAY

## DESCRIPTION

The PTD is designed for powering and displaying the readings from AWS Intelligent Torque Transducer ranges (I Series). The PTD features a bright, full colour LCD graphic display, showing the torque reading, both in large 6 digits, and analogue bar graph. The PTD features Run, Peak and 1st Peak mode operation, unit and limits selection via front *panel soft keys*. When using the limits features, external yellow, red and green LEDs indicate whether torque values are low, high or acceptable, and the 6 digit reading changes colour. The PTD displays torque in Nm, cNm, Lbf.Ft, Lbf.In and Ozf.In. RS232 output enables the PTD to be connected to a PC for direct input into ADMS Kepler 4 Calibration and Conformity Software (sold separately).

The 1010M is designed for use with the AWS UTWCM (Sold separately). The models 1010B and 1010H have internal rechargeable batteries for portable operation. These models also indicate the battery level status. The 1010H is a more rugged option for demanding environmental climates. The AWS Professional Transducer Display (PTD) is available in three versions: 1010M, 1010B and 1010H. All versions casings have a rugged solid design for withstanding shock & impact damage.

## SPECIFICATIONS

Model: PTD-	1010M	1010B	1010-H
Specification	Mains power supply from 12V DC charger.	Internal rechargeable batteries.	Internal rechargeable batteries. Heated display for use at sub-zero temperatures. Rated to IP 67.

### LCD Display:

- 70mm X 52mm Bright, Full Colour, Sunlight Readable LCD Display
- 6 Digit Active Reading
- Analogue Bar Graph
- Mode, Unit, Limit Selection and Setting Graphics via Soft Keys
- Battery State and Indication of Charging (1010B/H).

### Power:

1010M – Mains powered from 12V DC charger  
1010B/H - Internal Rechargeable Batteries allow for portable use. Auto power off function extends life of the display. Supplied with 12V DC charger.

### Accuracy:

Better than 1% of reading from 4% to 100% F.S.D when used with AWS Intelligent Torque Transducers.

### Limit Selection:

Low, Pass, High

### Units:

Nm, cNm, LbfFt, LbfIn, OzfIn

### Data Output:

9-pin D Standard Female Connector

### Operating temperature:

1010M/B: -10 to +50°C  
1010H: -20 to +50°C

### Temperature coefficient:

On Zero: 0.01% per °C  
On Span: 0.03% per °C

### Mode:



RUN



1<sup>st</sup> PEAK



PEAK

### Weight:

1.6 Kg

### Size:

160mm x 220mm x 200mm

### CE:

2014/30/EU


### EMC:

EN 61326-1:2013

### NATO Stock No:

5980-22-623-1641

### Screenshots:

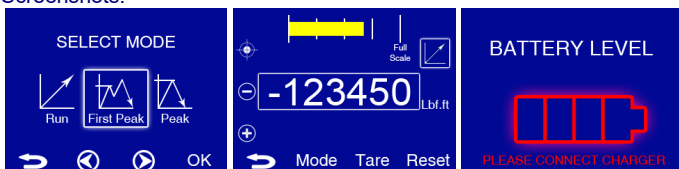

Left: Graphical mode selection. Centre: Reading screen showing mode/units selected and analogue bar graph. Right: Battery level warning



# PROFESSIONAL TORQUE TOOL TESTER


## DESCRIPTION

The AWS LTD Professional Torque Tool Tester range (PTTT), the companies' premier bench mounted tester range, for calibrating, testing and certifying hand torque tools.


The PTTT features a bright, full colour LCD graphic display, showing the torque reading, both in large 5 digits, and analogue bar graph. A flexible neck means the full colour display can be easily read from any position. It has internal rechargeable batteries for portable operation. Featuring Run, Peak and 1st Peak mode operation (selectable to allow use with all types of torque tool), unit and limits selection via front panel soft keys. When using the limits features, external yellow, red and green LEDs indicate whether torque values are low, high or acceptable, and the 5 digit reading changes colour. The display also indicates the battery level status. The RS232 output enables the PTTT to be connected to a PC for direct input into ADMS Kepler Torque Tool Calibration Software (sold separately). This allows for quick, accurate and precise calibration of torque tools.

## SPECIFICATIONS

Model: PTTT-1005-	10	50	250	1000
<b>Ranges:</b>	0.4 - 10Nm	2 - 50Nm	10 - 250Nm	40 - 1000Nm
<b>Square Drive Size:</b>	1/4"	3/8"	1/2"	3/4"

Accuracy:	Better than 1% of reading from 4 to 100% of Rated output. See Calibration certificate for full results.
Modes:	 <b>Run:</b> For Dial-type and Electronic Wrenches and Screwdrivers <b>Peak:</b> For Cam-type Wrenches and Screwdrivers. <b>1<sup>st</sup> Peak:</b> For Click-type Wrenches and Screwdrivers, retains reading until manually cancelled or for 3 seconds if auto cancel option is chosen.
LCD Display:	70mm X 52mm Bright Full Colour Sunlight Readable LCD Display of 5 Digit Active Reading, with Analogue Bar Graph, Mode Selection graphics, Battery State and indication of charging. Optional limit selection with colour indication shows whether a reading is Above Limit, Below Limit and Within Limit. All functions are selected and changed by soft keys.
Power:	Internal Rechargeable Batteries allow it to be used in the field. Auto power off function extends life of the display. Supplied with 12V DC power supply for charging batteries and mains power.
Data Output:	Female RS232 connection
Overload capability:	125%
Maximum mechanical overload:	160% of Range stated.
Operating temperature:	+5°C to +50°C. IP67.
Temperature coefficient:	On Zero: 0.01% per °C On Span: 0.03% per °C
Torque Standard:	BS 7882:2017
CE:	2014/30/EU
NATO Stock No:	PTTT-1005-50: 6625-22-623-1637 PTTT-1005-1000: 6625-22-623-16348

### ScreenShots:

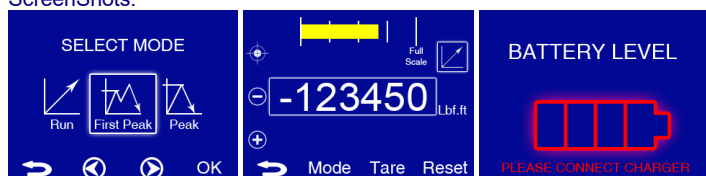

Left: Graphical Mode selection. Centre: Reading Screen Showing mode/ units selected and Analogue Bar graph. Right: Battery level warning



Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION




# PROFESSIONAL CALIBRATION TORQUE UNIT

## DESCRIPTION

The AWS LTD Professional Calibration Torque Unit (PCTU), our entry level bench mounted tester for production line or lower cost requirements for testing hand torque tools. With Multiple mode and unit selection as well as a tilting display providing a variety of viewing angles, it does not compromise on function or accuracy, displaying more precise torque values than any other entry level torque tool tester. The range is designed to calibrate all types of torque wrenches and torque screwdrivers, and has been selected to cover the large majority of torque tools without having to use two instruments for a single tool type. The RS232 output enables the PCTU to be connected to a PC for direct input into ADMS Kepler Torque Tool Calibration Software (sold separately). This allows for quick, accurate and precise calibration of torque tools.

## SPECIFICATIONS

Model: PCTU-1006-	10	50	250	1000
<b>Ranges:</b>	0.4 - 10Nm	2 - 50Nm	10 - 250Nm	40 - 1000Nm
<b>Square Drive Size:</b>	1/4"	3/8"	1/2"	3/4"

Accuracy:	Better than 1% of reading from 4 to 100% of Rated output. See Calibration certificate for full results.
Units:	Nm and Lbf.Ft or cNm and Lbf.In Selectable (Dependant on Range).
Modes:	 <b>RUN:</b> For Dial-type and Electronic Wrenches and Screwdrivers  <b>1<sup>st</sup> PEAK:</b> For Click-type Wrenches and Screwdrivers  <b>PEAK:</b> For Cam-type Wrenches and Screwdrivers
Display:	5 X 12.5mm digit LED. Adjustable viewing angle through 90°. LED's indicate selected mode and units. Selection and functions are changeable by four pushbuttons.
Power:	Internal Rechargeable Batteries allow it to be used in the field. Auto power off function extends life of the display. Supplied with 9V DC plug top power supply for charging batteries and mains power.
Mounting:	Wall or bench/pedestal mountable via 4 hole 8 mm dia bolt fixings (bolts not supplied).
Data Output:	Female RS232 connection.
Overload capability:	125%
Maximum mechanical overload:	160% of Range stated.
Operating temperature:	+0°C to +50°C.
Temperature coefficient:	On Zero: 0.01% per °C On Span: 0.03% per °C
CE:	2014/30/EU
EMC:	EN 61326: 2007
Torque Standard:	BS 7882:2017



Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION

# TRANSDUCER ANCILLARIES

*A selection of products which can be used with AWS Transducers, Displays and Bench Testers, and also in association with other manufacturers Transducers & Displays.*

<b>Transducer Ancillaries</b>	<b>PAGE</b>
<b>Precision Torque Adapters</b>	<b>31-32</b>
<b>Multiway Transducer Switch Box</b>	<b>33</b>
<b>Intelligent Instrument Transducer Cable</b>	<b>34</b>
<b>Transducer Cables</b>	<b>35</b>

# PRECISION TORQUE ADAPTERS

## Hex-Square Adapters

### DESCRIPTION

The AWS LTD Hex-Square precision calibration adapters, designed to improve the accuracy and reduce the uncertainty in torque calibration & apparatus. Our precision hex-square adapters cover a range of the most commonly used square drive and hex sizes. Because of this they can be used on a variety of different calibration machines and apparatus. They are manufactured to high tolerances out of hardened stainless steel to eliminate corrosion and increase the lifetime of the adapters. They are laser engraved with the size and model number for easy identification.

### SPECIFICATIONS

Part No:	Size:
CM105	1" F SQ to 36 F HEX
CM150	1" F SQ to 1/4" F HEX
CM151	1" F SQ to 6 F HEX
CM152	1" F SQ to 10 F HEX
CM153	1" F SQ to 17 F HEX
CM154	1" F SQ to 19 F HEX
CM155	1" F SQ to 22 F HEX
CM156	1" F SQ to 27 F HEX
CM106	3/4" F SQ to 36 F HEX
CM113	3/4" F SQ to 19 F HEX
CM107	1/2" F SQ to 19 F HEX

Part No:	Size:
CM111	1/2" F SQ to 17 F HEX
CM135	1/2" F SQ to 17 F HEX
CM109	3/8" F SQ to 10 F HEX
CM110	3/8" F SQ to 17 F HEX
CM112	3/8" F SQ to 19 F HEX
CM171	3/8" M SQ to 1/4" F HEX
CM172	3/8" M SQ to 1/4" M HEX
CM108	1/4" F SQ to 10 F HEX
CM170	1/4" M SQ to 1/4" F HEX
CM173	1/4" M SQ to 1/4" M HEX

## Keyway-Square Adapters

### DESCRIPTION

The AWS LTD Keyway-Square precision calibration adapters, designed to improve the accuracy and reduce the uncertainty in torque calibration & apparatus. Our precision keyway-square adapters cover a range of the most commonly used square drive and keyway sizes. Keyways can be produced to specific standard as well as non-standard sizes. Because of this they can be used on a variety of different calibration machines and apparatus. They are manufactured to high tolerances out of hardened stainless steel to eliminate corrosion and increase the lifetime of the adapters. They are laser engraved with the size and model number for easy identification.

### SPECIFICATIONS

Part No:	Size:
CM136	1/2" F SQ to 35 F KEY
CM137	3/4" F SQ to 35 F KEY
CM138	1" F SQ to 35 F KEY



## Square-Square Adapters

### DESCRIPTION

The AWS LTD Square-Square precision calibration adapters, designed to improve the accuracy and reduce the uncertainty in torque calibration & apparatus. Our precision square-square adapters cover a range of the most commonly used square drive sizes. Because of this they can be used on a variety of different calibration machines and apparatus. They are manufactured to high tolerances out of hardened stainless steel to eliminate corrosion and increase the lifetime of the adapters. They are laser engraved with the size and model number for easy identification.

### SPECIFICATIONS

Part No:	Size:
CM132	1/2" F SQ to 3/8" F SQ
CM139	3/8" F SQ to 3/8" F SQ
CM140	1/4" F SQ to 1/4" F SQ
CM141	1/4" F SQ to 3/8" F SQ
CM142	1" F SQ to 1.5" M SQ
CM146	1" F SQ to 3/4" M SQ
CM147	1" F SQ to 1/2" M SQ
CM148	1" F SQ to 3/8" M SQ
CM149	1" F SQ to 1/4" M SQ
CM143	3/4" F SQ to 1" M SQ
CM164	3/4" F SQ to 1/2" M SQ
CM165	3/4" F SQ to 3/8" M SQ

Part No:	Size:
CM166	3/4" F SQ to 1/4" M SQ
CM160	1/2" F SQ to 3/4" M SQ
CM167	1/2" F SQ to 3/8" M SQ
CM168	1/2" F SQ to 1/4" M SQ
CM144	1/2" F SQ to 1" M SQ
CM159	3/8" F SQ to 3/4" M SQ
CM162	3/8" F SQ to 1/2" M SQ
CM169	3/8" F SQ to 1/4" M SQ
CM145	3/8" F SQ to 1" M SQ
CM157	1/4" F SQ to 1" M SQ
CM158	1/4" F SQ to 3/4" M SQ
CM161	1/4" F SQ to 1/2" M SQ
CM163	1/4" F SQ to 3/8" M SQ

## Annular Transducer Mounting Adapters

The AWS LTD Annular Transducer Mounting Adapters, which are bespoke designed to fit any mounting arrangement, and designed to improve the accuracy of calibration results. They can be used to turn one of our high torque Annular Transducers into a high torque Inline Transducer. They are manufactured to high tolerances out of hardened stainless steel to eliminate corrosion and increase the lifetime of the adapters. They are laser engraved with the size and model number for easy identification.

## Unique Custom-Design Adapters

AWS LTD can custom design & manufacture unique high tolerance adapters for customers who require something specific that is not part of our range. These will be designed & checked to meet the customers' specification, manufactured to high tolerances, and plated to eliminate corrosion and increase the lifetime of the adapters. They are laser engraved with the size and custom model number for easy identification.

Advanced Witness Systems Ltd © 2020

MANUFACTURER INFORMATION	SUPPLIER INFORMATION
Advanced Witness Systems Ltd Unit 8 Beaumont Business Centre Beaumont Close Banbury OX16 1TN Tel: 01295 266939 Email: <a href="mailto:sales@awstorque.co.uk">sales@awstorque.co.uk</a>	



# MULTI-WAY TRANSDUCER SWITCH BOX



## DESCRIPTION

The AWS Ltd Multiway Transducer Switch Box (TSB) is designed to be used with the AWS Universal Torque Wrench Calibration Machine (UTWCM) and Professional Transducer Display (PTD). It switches between and provides continuous power (for thermal stability) to a number of AWS Intelligent Torque Transducers or Intelligent Instrumented Transducer Cables.

The Transducer Switch Box simultaneously powers the multiple transducers and the Professional Transducer Display. There are connectors on the back for RS232 output to a PC, and for communication with the PTD and UTWCM.

The PTD is connected to the TSB via a single cable, which connects to the Auxiliary port on the Display. The RS232 output data is generated by the PTD. The UTWCM is also connected to the TSB via a single cable, allowing the UTWCM to be run in automatic operation.

## SPECIFICATION

- Power:** Mains powered from 12V DC charger
- Inputs:** 4/6 off 6 Way Mil C Spec connectors
- Outputs:** 3 off 9-pin D Standard Female Connector:  
RS232 Output  
1010 Display  
UTWCM
- Size:** 17cm x 11cm x 9cm
- Weight:** 0.5 Kg



Model	1057-4	1057-6
Number of Transducers	4	6

Cables to use with the TSB can be supplied depending on specific customer requirements.

# TRANSDUCER CABLES

## Intelligent Instrument Torque Transducer Cable



The AWS LTD Intelligent Instrumented Torque Transducer Cable (IITC), is designed to convert standard mV/V transducers from any manufacturer into truly intelligent digital transducers.

The cable contains our Intelligent Instrumentation Package, outputting using CAN-BUS protocol to communicate with the AWS LTD Professional Transducer Display (PTD). This digital communication eliminates signal loss when using long lengths of cable, providing flexibility in communicating with other devices and systems.

Each cable is calibrated only to a specific dedicated transducer, remaining unique to that transducer.

Modes:



RUN



1<sup>st</sup> PEAK



PEAK

Communications:

Communications via can bus. (When used with the AWS PTD-1010 power & display unit).

Power and Display:

D.C power supply (When used with AWS PTD-1010, power and display is provided).

Connector:

Mil C 26482 series to Mil C 26482 series. 6 pin. Shell size 10.

Model: IITC-1008-	1	2	5	10
Length:	1m	2m	5m	10m



Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION

## Intelligent Torque Transducer Connector Cable

The AWS LTD Intelligent Torque Transducer Cable (ITC), used to connect any AWS LTD Intelligent (I Series) Transducer to the AWS LTD Professional Transducer Display (PTD). It has a female MIL C connector transducer-end, and a male MIL C connector display-end. These cables come in a selection of standard lengths, or if a specific length is required, we will manufacture one to specification.

Model: ITC-1009-	1	2	5	10
Length:	1m	2m	5m	10m



## N-SERIES Torque Transducer Cable

The AWS LTD N-SERIES Torque Transducer Cable range (NTC), our basic cable for connecting our A SERIES and N SERIES transducers to other manufacturers displays which use MIL-C or LEMO connectors for signal input. These cables come in a selection of standard lengths, or if a specific length is required, we will manufacture one to specification.

Model: NTC-	2008	2009	2010
Female Connector:	6 Pin MIL-C	6 Pin MIL-C	10 Pin MIL-C
Male Connector:	6 Pin MIL-C	10 Pin LEMO	10 Pin LEMO

These cables come in a selection of standard lengths, or if a specific length is required, we will manufacture to specification.

Model: NTC-20##-	1	2	5	10
Length:	1m	2m	5m	10m

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION

# CALIBRATION MACHINES

***Our Torque Calibration Machines are for calibrating Torque Tools and Transducers to the latest International Torque Standards.***

<b>Calibration Machines</b>	<b>PAGE</b>
<b>Torque Wrench Calibration Machine</b>	<b>37-38</b>
<b>Torque Screwdriver Calibration Machine</b>	<b>39-40</b>
<b>Universal Torque Calibration Machine</b>	<b>41-42</b>
<b>2Nm Calibration Machine</b>	<b>43</b>

# UNIVERSAL TORQUE WRENCH CALIBRATION MACHINE

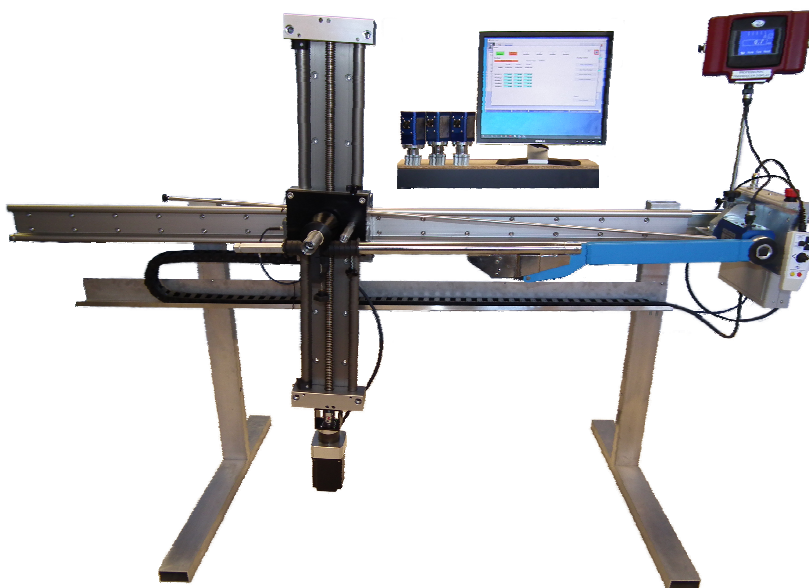


Photo above shows a UTWCM with AWS Intelligent Inline Torque Transducers, Professional Transducer Display, and Laptop/Computer running ADMS Kepler 4 Software for Calibration & Conformity to ISO 6789:2017 Parts 1 and 2.

## DESCRIPTION

The all new AWS Universal Torque Wrench Calibration Machine (UTWCM) provides an efficient means of calibrating and testing manually operated torque wrenches to ISO 6789:2017 or company specific standards and specifications.

The UTWCM is available in 4 versions; Automatic or Semi-automatic operation and ranges up to either 1500Nm or 3000Nm. All versions apply the force to the tool via a linear carriage stepper motor and an AWS microcontroller. An important feature is the minimization of parasitic forces applied to the torque wrench handle, due to the method of mounting the torque wrench. All versions of the machine can be used with our new ADMS Kepler 4 software to speed up completion of the calibration & certification process to ISO 6789:2017, ISO 6789:2003 or type approval for manufacturers.

The automated UTWCM uses AWS Intelligent Inline Torque Transducers (IITT's) and a Professional Transducer Display (PTD) to provide feedback to the microcontroller, automatically detecting a first peak signal for setting type wrenches, stopping the machine and returning to zero, greatly speeding up the calibration process and reducing operator input.

The semi-automatic UTWCM, using its push buttons, controls the force on the tool. It relies on the operator to detect the target torque and stop the machine.

## SPECIFICATION

Model: UTWCM -	1500 - S	1500 - A	3000 - S	3000 - A
Range:	1500 Nm	1500Nm	3000 Nm	3000 Nm
Manual or Semi-Automatic:	Semi - Automatic	Automatic	Semi - Automatic	Automatic

## SHARED FEATURES

- Designed to calibrate/test wrenches up to either 1,500 or 3,000 N·m.
- Removes the need for operators to apply high application forces to the handle of large torque wrenches. Force is applied using inbuilt AWS proprietary firmware, a stepper motor and linear track system.

- Hand controls for fast movement or jog facilitate quick setting up of individual wrenches.
- Multiple safety features ensure that the machine, transducers and torque wrench are not overloaded in operation or over driven due to a wrench fault.
- Inbuilt microcontroller for accurate control of force applied and operation speeds. Four different pre-programmed, switch selected speed settings for different ranges of tools. The microcontroller ensures the adherence to the minimum target torque approach times, complying with the ISO standard 6789:2017, for the capacity of wrench being calibrated.
- Parasitic forces acting on the wrench during calibration are greatly reduced by the method of mounting the torque wrench.
- Single transducer cassette variations for different transducer manufacturers are available or built to suit customer requirements.
- To accommodate wrenches with fixed heads the transducer mounts in our carriages can be rotated 360 ° in steps of 30°.



UTWCM with 60N·m Torque Wrench

## AUTOMATED FEATURES

- A Customer's existing transducers can be converted into IITTs using AWS's Intelligent Instrumented Transducer Cables. Each cable has an inline module converting the analogue output of the transducer into a digital torque signal for display on the PTD.
- Connecting an AWS IITT automatically programs the AWS PTD to the correct range.
- When operating the AWS PTD in First Peak mode for click wrenches, the machine will run a complete operation cycle automatically.



Simple and Intuitive Handheld Controller

## DIMENSIONS

Dimensions for mounting on floor:

UTWCM-1500: Approx. 77cm D by 205cm W by 135cm H. Footprint is approx. 77cm D by 165cm W.

UTWCM-3000: Approx. 77cm D by 266cm W by 135cm H. Footprint is approx. 77cm D by 165cm W.

Depth, Width and Height can be altered if required within certain parameters.

**MORE INFORMATION ON THE INTELLIGENT INLINE TORQUE TRANSDUCERS RANGE, PROFESSIONAL TRANSDUCER DISPLAY AND KEPLER 4 SOFTWARE IS AVAILABLE IN SEPARATE DATA SHEETS ON THE AWS WEBSITE [WWW.AWSTORQUE.CO.UK](http://www.awstorque.co.uk).**

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

### SUPPLIER INFORMATION



# UNIVERSAL TORQUE SCREWDRIVER CALIBRATION MACHINE



*Photo above shows a UTSCM with Control Box, Handheld Controller, and an Intelligent Inline Torque Transducer.*

## DESCRIPTION

The all new AWS Universal Torque Screwdriver Calibration Machine (UTSCM) for compliance to ISO 6789:2017 provides an efficient means of calibrating and testing manually operated torque screwdrivers to international or company specific standards and specifications.

The UTSCM applies torque to the screwdriver via a stepper motor and an AWS microcontroller, the torque achieved is measured by 1 of 3 AWS Intelligent Inline Torque Transducers (IITT's), connected to an in-built Professional Transducer Display to automatically detect a peak signal.

The UTSCM can be used with our new ADMS Kepler 4 software to speed up completion of the calibration & certification process to ISO 6789:2017, 2003 or type approval for manufacturers.

With the variation in torque screwdriver operation, the UTSCM using a microcontroller, runs through a learning cycle before calibration to record the shape of the torque curve, to ensure the torque is applied at the correct rate to meet the ISO standard. As required by the standard, the number of operations are selectable, capturing each reading consecutively, greatly reducing the time for the calibration & certification process.


Due to the great variation in screwdriver handles, grip adaptors are bespoke designed to fit a specific model. This to minimise the uncertainty of torque screwdriver alignment, ensuring it is within  $\pm 2^\circ$  of vertical alignment, as required by the standard.

## FEATURES

- Designed to calibrate/test screwdrivers up to 30 N·m.
- Inbuilt microcontroller and display for accurate control of torque applied and operational speed. The microcontroller learns the shape of the torque curve, ensures adherence to the minimum and maximum target torque approach times, complying with the ISO standard, for the setting of the screwdriver being calibrated.
- The screwdriver type can be selected, to be either cam, dial (indicating) or click type.
- The number of operations run consecutively can be selected, to be either 1, 3, 5 or 10 as required by the standard.



- An in-built 3-Way Transducer Switch Box keeps the AWS Intelligent Transducers powered continually, aiding temperature stability. This allows quick selection of transducers. The controller automatically interrogates and displays the correct transducer range.
- Interchangeable handle adaptors each designed to accurately fit the model of torque screwdriver to minimise the uncertainty of adaptor alignment and ensure the screwdriver is within  $\pm 2^\circ$  of vertical.
- Height adjustable transducer carriage taking into account varying torque screwdriver lengths.
- Pendant control for fast movement or jog facilitate quick setting up of individual screwdrivers.
- Safety features ensure that the machine, transducers and screwdriver are not overloaded in operation or over driven due to a fault.
- 3/8" - 1/4" female square drive compatible with a range of torque transducers.
- A customer's existing transducers may be converted into IITTs using AWS's Intelligent Instrumented Transducer Cables. Each cable has an inline module converting the analogue output of the transducer into a digital torque signal for display on the PTD.
- 70mm X 52mm Bright, Full Colour, Sunlight Readable LCD Display built into the microcontroller.
- Soft keys, in conjunction with the graphics, allow selection of the required Mode, Measurement Unit, and Limit Selections.
- Active 6 Digit display. Accuracy better than 1% of reading from 4% to 100% full scale deflection of the selected transducer when used with AWS Intelligent Torque Transducers.
- Used in collaboration with the AWS/ADMS Kepler 4 software for torque screwdrivers improves efficiency, speeds up completion of the calibration & certification process to ISO 6789:2017.

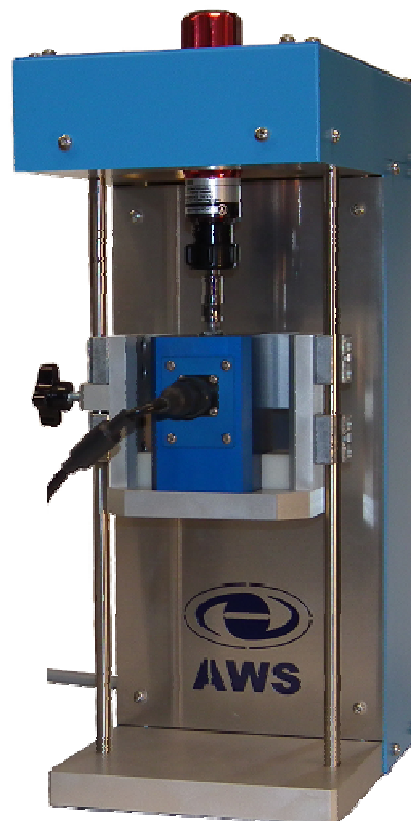

*UTSCM with 6N·m Torque Screwdriver and 10N·m Intelligent Inline Torque Transducer*

## DIMENSIONS

Dimensions for mounting on benches/ tables: Approximately 31cm L by 45cm W by 45cm H.

UTSCM Weight: 16.5kg with an AWS IITT transducer, Control Box Weight: 5kg

**MORE INFORMATION ON THE INTELLIGENT INLINE TORQUE TRANSDUCERS RANGE AND KEPLER 4 SOFTWARE IS AVAILABLE IN SEPARATE DATA SHEETS ON THE AWS WEBSITE [WWW.AWSTORQUE.CO.UK](http://WWW.AWSTORQUE.CO.UK).**


Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

### SUPPLIER INFORMATION

# 2kNm UNIVERSAL TORQUE CALIBRATION MACHINE (COMING SOON)

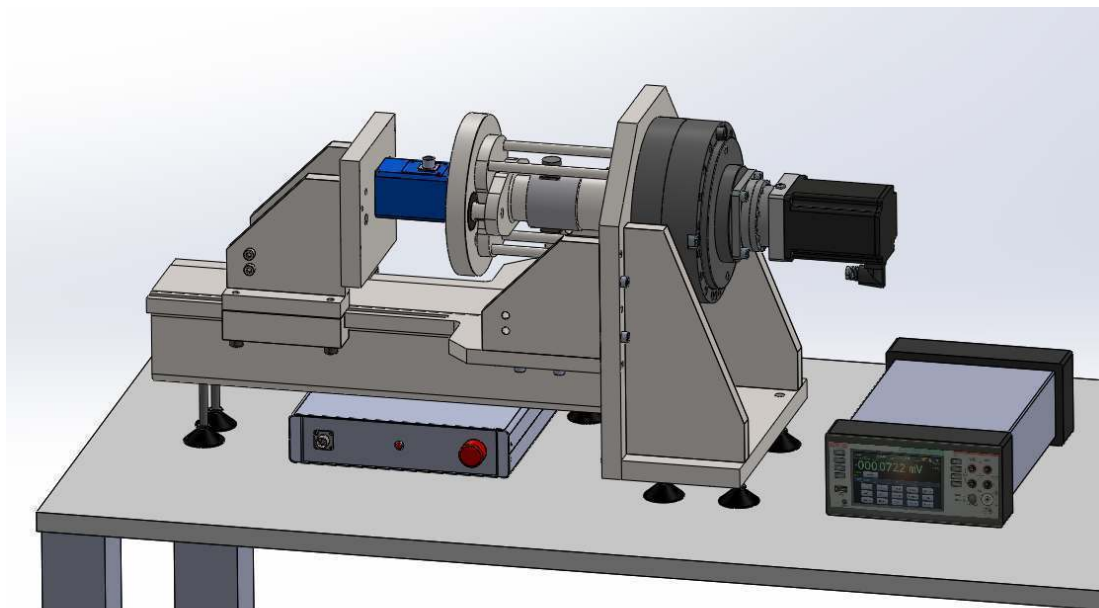

*Bench mounted machine with Torque Transducer Sliding Carriage, 2kNm Master Transducer and Voltmeter. AWS 2014-IIT 250Nm Torque Transducer shown as device under test (Sold Separately).*

## DESCRIPTION


The AWS 4Nm-2000Nm Universal Torque Calibration Machine (3020-UTCM) is designed to provide a compact, efficient way to calibrate torque measuring devices to BS EN 7882:2017, BS EN:7996:2018 or international standards without the need for beams and weights. The machine uses two AWS Master Transducers (2000Nm and 100Nm) with very high accuracy, stability and low uncertainty. The master transducers output to an extremely accurate 6.5 digit computing digital voltmeter to display the applied torque and to attain the required uncertainty of measurement (Certificate of conformity provided).

The UTCM uses a high ratio anti backlash gearbox and stepper motor drive to apply and hold up to 2kNm torque. This is controlled by a pushbutton pendant controller removing the need for the operator to apply weights altogether (eliminating operator fatigue) and speeding up the calibration.

An additional Torque Tester Extension carriage with horizontal or additionally vertical fittings for a variety of torque measuring devices is available as an option (Sold Separately).


## FEATURES

- **Electronic drive system and push button pendant control, eliminating the need for the operator to manually apply torque.**
- **Easily interchangeable inline master transducers for high accuracy and low uncertainty readings of the nominal torque. Range from 4 Nm to 2kNm.**
- **High ratio anti-backlash gearbox for precise torque application.**
- **Greatly reduced calibration times.**

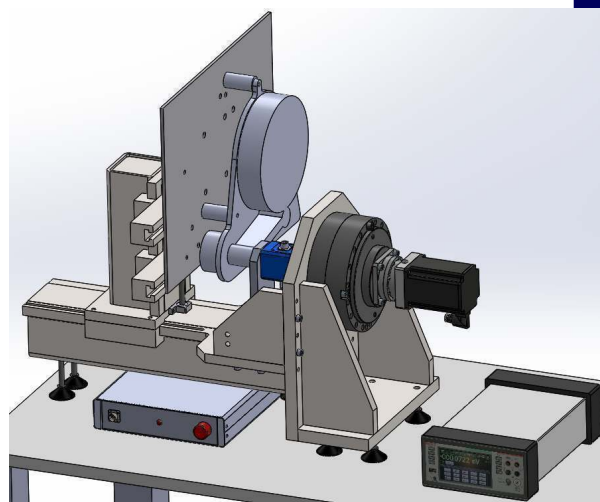

UTCM with Tool Tester Extension and Vertical Mounted Torque Tester fittings. Acratork L2 shown as example device under test.

- Sliding carriage for calibration of standard sized torque transducers up to a 1" square drive.
- Bench or Pedestal mounting options available.
- Optional additional sliding carriage and fittings for calibration of a wide variety of torque measuring and calibration devices. Multi-axis T slot system for pick up of a range of fixing positions.
- Use with AWS Precision Torque Adaptors each designed to accurately fit the model of torque testing device to minimise the uncertainty of adaptor alignment.
- Additional alternative bed position for additional vertical height adjustment, covering the wide variety of torque measuring devices available.
- High accuracy 6½ digit meter used to display the nominal torque readout from the master transducers to attain the required uncertainty of measurement.
- Jog function to precisely apply small increments of torque.

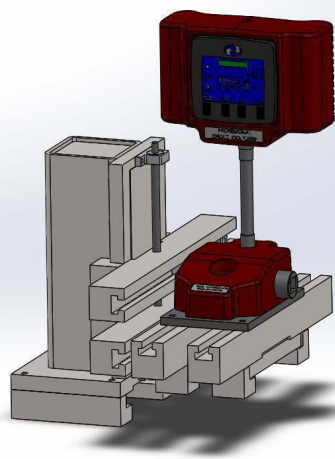

Torque Tester Extension with fittings for horizontal mount Torque Testers. AWS 1005 shown as device under test. (Sold separately)

## OPTIONS

	3020 - Universal Torque Calibration machine (UTCM)	Options	
		Tool Tester Extension	Vertical Mounting Extension (Requires Tool Tester Extension)
Model No.	3020	3020-E	3020-EV
Description	Calibration of torque transducers from 4Nm-2000Nm with square drives from ¼" to 1".	Additional fittings for calibration of vertical and horizontal mounting Torque Testers.	Additional fittings for calibration of large vertical or wall mounted Torque Testers.

## DIMENSIONS

Approx. dimensions for mounting on benches/tables: 94cm (length) x34cm (width) x40cm (height)

Approx. Weight (Kg):

Main Body (Without Transducers & Carriages)	Transducer Sliding Carriage	Torque Tester Sliding Carriage (Depending on options)	2kNm Transducer Cassette
90.0	16.7	24 - 40.5	13.5

Advanced Witness Systems Ltd © 2020

MANUFACTURER INFORMATION	SUPPLIER INFORMATION
Advanced Witness Systems Ltd Unit 8 Beaumont Business Centre Beaumont Close Banbury OX16 1TN Tel: 01295 266939 Email: sales@awstorque.co.uk	


# 2 Nm CALIBRATION MACHINE

## DESCRIPTION

The AWS LTD 2Nm Calibration Machine (CR1020), designed to calibrate torque transducers, torque watches and torque screwdrivers, up to 2 Nm. It is highly accurate and uses a disc and weights to apply torque. Weights applied at a known distance on the circumference of the disc via balanced suspension cords and weight pans. The Versatile 2Nm calibration machine enables the tool to be accurately positioned, and held for calibration. Adjustable levelling feet with the spirit level indication allow it to be used on a variety of bench surfaces.

## SPECIFICATIONS

Capacity:	0.05 cNm to 2.5 N.m.
Uncertainty of measurement:	+/- 0.2%
Mounting:	Bench mounted with levelling indication and adjustment.
Maximum mechanical overload:	125% of Range stated.
Operating temperature:	20°C.
Directions of use:	Clockwise and anti-clockwise calibration. +/-270 degrees of rotational freedom to accommodate torque watches
Capability:	All types of torque watch, AWS IITT-1011 and third party torque transducers. It can also be used with a variety of other very small torque measuring devices.

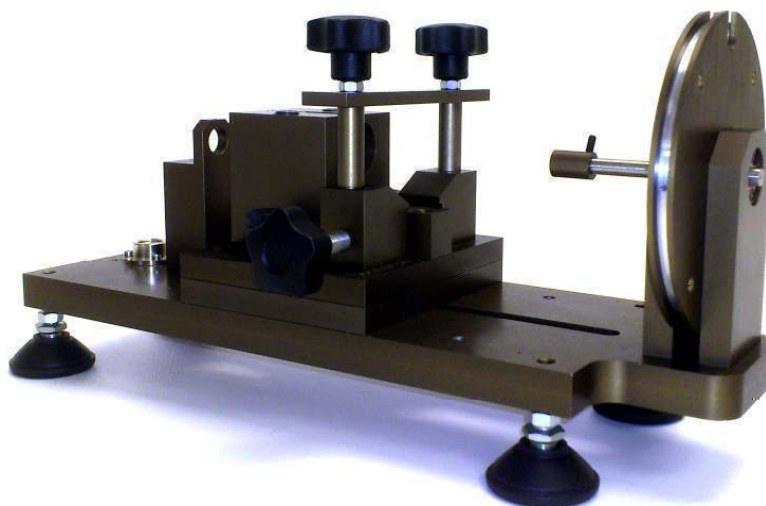

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

### SUPPLIER INFORMATION

# ADMS SOFTWARE

*Our software arm*

## **ADVANCED DATA & MEASUREMENT SERIES**

*designs and produces torque tool and torque transducer calibration, uncertainty calculation and certification software for use with PC's.*

*Our software can be used to improve calibration accuracy & efficiency, tracking tools & customers, and removing the need for spreadsheets.*

*Our Kepler 4 software is our most comprehensive torque tool calibration software on the market today, for the calibration and certification of torque wrenches to BS EN ISO 6789:2017, 2003 or your own in-house standards, and for keeping track of each individual wrench.*

<b>ADMS Software</b>	<b>PAGE</b>
<b>Kepler 4 Combined</b>	<b>45-46</b>
<b>Kepler 4 Conformity</b>	<b>47-48</b>
<b>Kepler 4 Calibration</b>	<b>49-50</b>
<b>Kepler 4 Software Comparison</b>	<b>51</b>



# KEPLER 4 FOR 2017 COMBINED

***The combined program for the calibration and certification of torque wrenches to BS EN ISO 6789:2017 or your own in-house standards, and for keeping track of each individual wrench.***

Kepler 4 is built around a new works orders database, which ties together the customer, tool, model, reading & certificate.



## KEY CONFORMITY FEATURES

- Complies with ISO 6789:2017 Part 1, allowing the automatic calculation of the mean deviation and mean value for each setting.
- Also calculates the deviation for each reading, and indicates by colour whether the reading is within tolerance to the selected standard.

## KEY CALIBRATION FEATURES

- Complies with ISO 6789:2017 Part 2, allowing the automatic calculation using new formulae of the mean, deviation & combined uncertainty of each set of readings, for each torque tool.
- Calibrates both square and hexagonal drive wrenches.
- Full tracking of tools calibration performance and history. Produce a report listing tools that require calibrating.
- The ability to calculate average values of uncertainties Bod, Bint and BI over the last 10 calibrated tools of the same model.
- The ability to Colour the Calibration, to apply colour indicators to the results to show whether the deviation is within tolerance for the tool type as defined in ISO 6789:2017 Part 1. This can also be displayed on printed reports.

## KEY SHARED FEATURES INCLUDE

- Powerful search function allows historic calibration and conformity certificates to be easily found from searching by customer, tool or model; works order number or certificate number.
- Bespoke templates easily created for certificates, reports and labels. Auto or manual certificate numbering.
- Option to operate in 6789:2003 to allow phased migration to 6789:2017.
- Tool performance & data input via COM port and keyboard. Option for bar code direct entry.
- A Miscellaneous Tools feature, allowing storage of non-torque tool information for use in recording the calibration of Miscellaneous Tools, generating overdue tool reports, and certificate front pages.
- Exporting of results data as a csv file for use in other programs.

## OTHER FEATURES INCLUDE

- All certificate print details recorded. Enables exact reproduction ensuring full traceability.
- Multiple operator accounts for users, maintainers & administrators (with passwords).
- Cloning facility speeds multiple data entry.
- Import and Export reports into text or spreadsheet formats for more efficient database backup.
- Databases can be converted from Kepler 3, 2002 and 2000 allowing faster start up for previous customers.
- Databases can be stored locally or on a server for more efficient backup.
- Multiple translations available, including the facility to create your own translation.
- Data output and report generation collated and filtered from any combination of good and out of tolerance tools.
- Comprehensive user manual.
- Free demonstration and 6 months full help and support included in purchase.
- Certificate conversion available on enquiry.

## SYSTEM REQUIREMENTS:

Minimum Screen Resolution: 1280x768.  
Software is a .NET application using an SQL Database.  
Minimum System: i5 Processor or equivalent, 4GB RAM, on board graphics. Keyboard & Mouse Interface.

*Disclaimer: This datasheet may not reflect the latest version of the software. For more information, visit our website: [www.awstorque.co.uk](http://www.awstorque.co.uk).*

## ALSO AVAILABLE AS SEPARATE CONFORMITY AND CALIBRATION VERSIONS

Advanced Data & Measurement Systems is a Trading name owned by  
Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

### SUPPLIER INFORMATION

The image displays four screenshots of the Advanced Witness Systems software interface. The top screenshot shows the 'Readings' module with a table of readings for different settings (10,000 N.m, 30,000 N.m, 50,000 N.m) and a 'Reading Control' panel. The second screenshot shows the 'Current Works Order' module with a list of orders and a 'Selected Customer/Tool' panel. The third screenshot shows the 'Calibration Instrument and Lab Settings' module with a list of instruments and a 'Reading Settings' panel. The bottom screenshot shows the 'Reading Details' module with a table of readings and a 'Control' panel.



# KEPLER 4 FOR CONFORMITY



*The program for the certification of torque wrenches to BS EN ISO 6789:2017 Part 1, or your own in-house standards, and for keeping track of each individual wrench.*

Kepler 4 is built around a new works orders database, which ties together the customer, tool, model, reading & certificate.



## KEY FEATURES INCLUDE

- Complies with BS EN ISO 6789:2017 Part 1, allowing the automatic calculation of the mean deviation and mean value for each setting.
- Calculates the deviation for each reading, and indicates by colour whether the reading is within tolerance to the selected standard.
- Powerful search function allows historic conformity certificates to be easily found from searching by customer, tool or model; works order number or certificate number.
- Bespoke templates easily created for certificates, reports and labels.
- Auto or manual certificate numbering.
- Tool performance & data input via COM port and keyboard. Option for bar code direct entry.
- Databases can be stored locally or on a server for more efficient backup.
- Data output and report generation collated and filtered from any combination of good and out of tolerance tools.
- All certificate print details recorded. Enables exact facsimile reproduction ensuring full traceability.
- A Miscellaneous Tools feature, allowing storage of non torque tool information for use in recording the calibration of Miscellaneous Tools, generating overdue tool reports, and certificate front pages.
- Exporting of results data as a csv file for use in other programs.

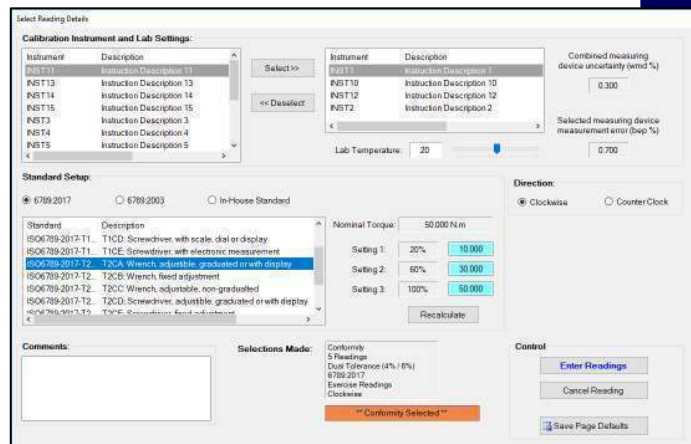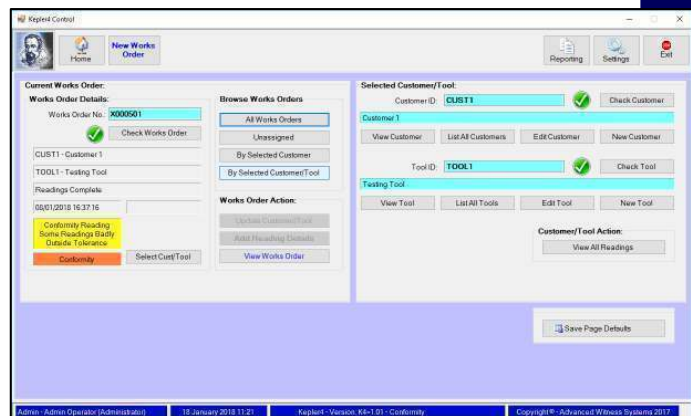

## OTHER FEATURES INCLUDE

- Option to operate in 6789:2003 to allow phased migration to 6789:2017.
- Multiple operator accounts for users, maintainers & administrators (with passwords).
- Cloning facility speeds multiple tool data entry.
- Import and Export reports into text or spreadsheet formats for more efficient database backup.
- Databases can be converted from Kepler 3, 2002 and 2000 allowing faster start up for previous customers.
- Multiple translations available, including the facility to create your own translation.
- Comprehensive user manual.
- Free demonstration and 6 months full help and support included in purchase.
- Certificate conversion available on enquiry.

## SYSTEM REQUIREMENTS:

Minimum Screen Resolution: 1280x768.

Software is a .NET application using an SQL Database.

Minimum System: i5 Processor or equivalent, 4GB RAM, on board graphics.

Keyboard & Mouse Interface.

*Disclaimer: This datasheet may not reflect the latest version of the software. For more information, visit our website: [www.awstorque.co.uk](http://www.awstorque.co.uk).*

## ALSO AVAILABLE: KEPLER 4 FOR CALIBRATION, AND KEPLER 4 COMBINED

Advanced Data & Measurement Systems is a Trading name owned by  
Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

### SUPPLIER INFORMATION

Data was correct at time of publication.  
Catalogue Page 48

# KEPLER 4 FOR CALIBRATION



*The program for the calibration of torque wrenches to BS EN ISO 6789:2017 Part 2, or your own in-house standards, and for keeping track of each individual wrench.*

Kepler 4 is built around a new works orders database, which ties together the customer, tool, model, reading & certificate.



## KEY FEATURES INCLUDE

- Complies with BS EN ISO 6789:2017 Part 2, allowing the automatic calculation using new formulae of the mean, deviation and combined uncertainty of each set of readings, for each torque tool.
- Powerful search function allows historic calibration and conformity certificates to be easily found from searching by customer, tool or model; works order number or certificate number.
- Calibrates both square and hexagonal drive wrenches.
- Full tracking of tools calibration performance and history. Produce a report listing tools that require calibrating.
- The ability to calculate average values of uncertainties Bod, Bint and BI over the last 10 calibrated tools of the same model.
- Bespoke templates easily created for certificates, reports and labels. Auto or manual certificate numbering.
- Auto or manual certificate numbering.
- Tool performance & data input via COM port and keyboard. Option for bar code direct entry.
- All certificate print details recorded. Enables exact facsimile reproduction ensuring full traceability.
- Option to operate in 6789:2003 to allow phased migration to 6789:2017.
- The ability to Colour the Calibration, to apply colour indicators to the results to show whether the deviation is within tolerance for the tool type as defined in ISO 6789:2017 Part 1. This can also be displayed on printed reports.
- A Miscellaneous Tools feature, allowing storage of non torque tool information for use in recording the calibration of Miscellaneous Tools, generating overdue tool reports, and certificate front pages.

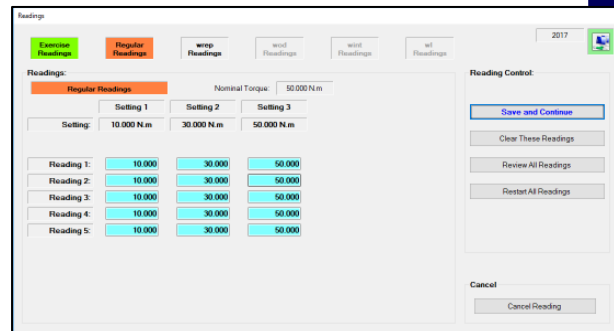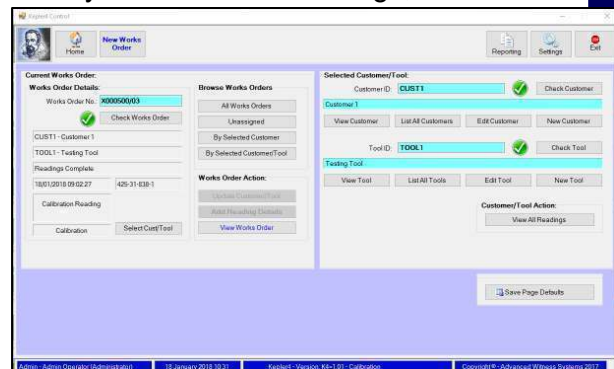

## OTHER FEATURES INCLUDE

- Exporting of results data as a csv file for use in other programs.
- Multiple operator accounts for users, maintainers & administrators (with passwords).
- Cloning facility speeds multiple data entry.
- Import and Export reports into text or spreadsheet formats for more efficient database backup.
- Databases can be converted from Kepler 3, 2002 and 2000 allowing faster start up for previous customers.
- Databases can be stored locally or on a server for more efficient backup.
- Multiple translations available, including the facility to create your own translation.
- Data output and report generation collated and filtered from any combination of good and out of tolerance tools.
- Comprehensive user manual.
- Free demonstration and 6 months full help and support included in purchase.
- Certificate conversion available on enquiry.

## SYSTEM REQUIREMENTS:

Minimum Screen Resolution: 1280x768.  
Software is a .NET application using an SQL Database.  
Minimum System: i5 Processor or equivalent, 4GB RAM, on board graphics.  
Keyboard & Mouse Interface.

*Disclaimer: This datasheet may not reflect the latest version of the software. For more information, visit our website: [www.awstorque.co.uk](http://www.awstorque.co.uk).*




## ALSO AVAILABLE: KEPLER 4 FOR CONFORMITY, AND KEPLER 4 COMBINED

Advanced Data & Measurement Systems is a Trading name owned by  
Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: [sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

### SUPPLIER INFORMATION

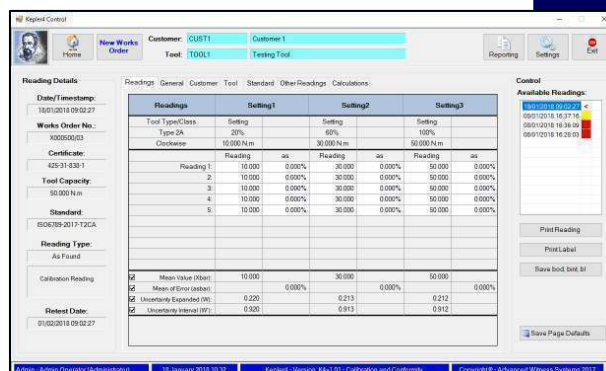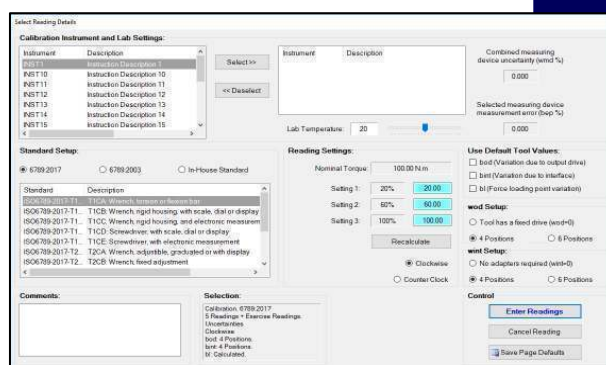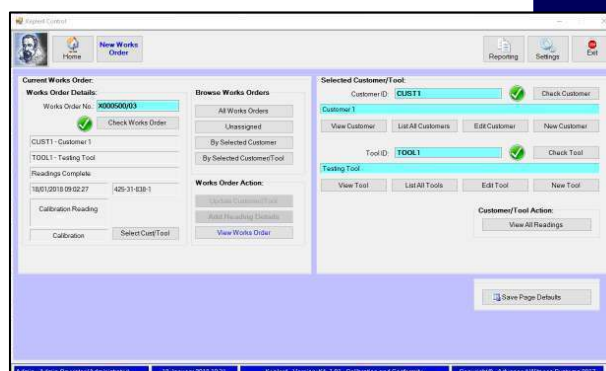



# KEPLER 4 SOFTWARE COMPARISON

Feature	Kepler Lite 3	Kepler 3	Kepler 4		
			Conformity	Calibration	Combined
Complies with ISO 6789:2003 and BS EN 26789:2003 torque standards.	✓	✓	✓	✓	✓
Full tracking of tool tightening performance.	✓	✓	✓	✓	✓
Full tracking of tools calibration performance and history.	✓	✓	✓	✓	✓
Tool performance & data input via COM port and keyboard. Option for bar code direct entry.	✓	✓	✓	✓	✓
Shows torque out of limits for selected tool.	✓	✓	✓	✓	✓
Automatically calculates average and deviation of each set of readings.	✓	✓	✓	✓	✓
User generated database for tool types and torque parameters required.	✓	✓	✓	✓	✓
Data output and report generation collated and filtered from any combination of good and out of tolerance tools. Uses include monthly reports, etc.	✓	✓	✓	✓	✓
Calibration Instrument/Machine/Inspection details.	✓	✓	✓	✓	✓
Bespoke templates easily created for your certificates, reports and labels.	✓	✓	✓	✓	✓
Auto or manual certificate numbering.	✓	✓	✓	✓	✓
All certificate print details recorded. Enables exact facsimile reproduction.	✓	✓	✓	✓	✓
Select different printers for readings, labels, and reports/certificates.	✓	✓	✓	✓	✓
Translation screens and print out can be converted to the language of your choice.	✓	✓	✓	✓	✓
Multiple operator accounts (With password protection).	✓	✓	✓	✓	✓
Produce a report listing tools that require calibrating.		✓	✓	✓	✓
Tool identification and serial number identification.		✓	✓	✓	✓
Fast tool search by user set criteria.		✓	✓	✓	✓
Tool area and station location.		✓	✓	✓	✓
Cloning facility speeds multiple tool data entry.		✓	✓	✓	✓
Colour configuration.		✓	✓	✓	✓
Complies with BS EN ISO 6789:2017 Part 1, allowing the automatic calculation of the mean deviation and mean value for each setting.			✓		✓
Calculates the deviation for each reading, and indicates by colour whether the reading is within tolerance to the selected standard.			✓		✓
Complies with BS EN ISO 6789:2017 Part 2, allowing the automatic calculation using new formulae of the mean, deviation and combined uncertainty of each set of readings, for each torque tool.				✓	✓
Full tracking of tools calibration performance and history. Produce a report listing tools that require calibrating.				✓	✓
Production Line capabilities, for hourly or daily tool reliance performance.				✓	✓
Model readings can be analysed to generate average bod, bint and bl values from 10 or more tools, to be used for future tools.			✓	✓	✓
Instrument database which allows combination of 5 instrument items, such as TD/Lead/Display.			✓	✓	✓
Standards database, including ISO 6789:2017 & 2003 pre-entered.			✓	✓	✓
Historic calibration and conformity certificates can be found from searching by customer and tool, by works order number, or by certificate number.			✓	✓	✓
User generated databases for customers, instruments, tools, models, & standards.			✓	✓	✓
Fast tool entry from model database.			✓	✓	✓
Import signatures as pictures.			✓	✓	✓
Implementation of works order tracking system.			✓	✓	✓
New simplified and improved screen layouts.			✓	✓	✓
New system using .NET framework and sequel databases.			✓	✓	✓

Advanced Witness Systems Ltd © 2020

## MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

## SUPPLIER INFORMATION

Data was correct at time of publication.  
Catalogue Page 51

# WIRELESS TELEMETRY LOAD MEASUREMENT

*Our Wireless Telemetry Load Measurement System, designed primarily for load lifting systems.*

<b>Wireless Telemetry Load Measurement</b>	<b>PAGE</b>
<b>System Overview</b>	53-55
<b>Wireless Telemetry Load Display</b>	56
<b>Wireless Telemetry Load Link</b>	57-58
<b>Wireless Telemetry Load Pin</b>	59-60
<b>Wireless Telemetry Anti 2-Block</b>	61-62

# WIRELESS TELEMETRY LOAD MEASUREMENT SYSTEM

## DESCRIPTION

The AWS Wireless Telemetry Load Measurement System is designed primarily for load lifting systems.

Multiple Load Links, each with its own digital telemetry transceivers with self-contained batteries, send the data of the loads to a Gateway Router, which acts as a slave Modbus RTU device. In this application a Modbus to Canbus converter to a PLC is part of the full lifting system. The Canbus enables the system to work with the lifting systems Canbus operating data bus. Alternatively a wireless display may be used over the gateway router for improved portability.

Additional is a Load Pin for an attached jib crane and a safety Anti 2-Block telemetry switch, again self-powered. The Anti 2-Block switch also comes with a weight and chain.

- Each load transducer (link and pin) and Anti 2-Block switch have a unique ident number with which to identify their readings.
- Battery state indicators in the telemetry data show when batteries need changing.
- Each load link and pin is supplied with a calibration certificate traceable to UK national standards.
- The whole system comes programmed ready for use.
- Each cell and unit are to IP67 and operating temperature range of -25 to +55°C.
- Note the router and converter require external power.
- Meets the CE RED directive, and FCC regulations.

For efficient operation, minimum maintenance and long battery life, the load link, load pin and switch go to minimum power requirements until woken up when needed.

This application shown in use in a marina is for lifting large boats/vessels from the water for storage or maintenance with a power driven, hydraulic motors controlled system using a remote portable telemetry, manual operating system. The Load Links tell the operator how much he is lifting and how well balanced. The Load Pin and Anti 2-Block switch enable the operator to lift individual units on and off the vessel.

The systems can also be used in marinas /harbours for jetties, platforms etc., in factories for moving large items such as tanks and engines.






These are the parts for the system:

### TELEMETRY LOAD LINK

- Range 5 to 250 Tonne
- Transmission Distance up to 200m
- For use with standard shackles
- 5 Step Linearisation
- Auto Power Down
- Sealed to IP67

For more information, please see the Telemetry Load Link Datasheet.

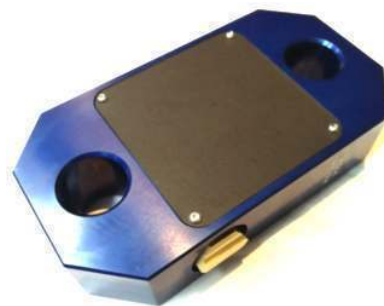

### TELEMETRY LOAD PIN

- Strain Gauged Internally
- Capacity 25 Te
- 5 Step Linearisation
- Auto Power Down
- Transmission Distance up to 200m
- Sealed to IP67

For more information, please see the Telemetry Load Pin Datasheet.



### TELEMETRY ANTI 2-BLOCK

- Fully weatherproof
- Fail safe operation
- 5 & 10kg bob-weight options
- ATEX version available
- Auto power down
- Transmission distance up to 200m

For more information, please see the Telemetry Anti 2-Block Datasheet.



### GATEWAY ROUTER

- Communicates with all other telemetry modules
- Acts as a Modbus Slave device, storing module readings & status' in read-only registers
- Controls wakeup and sleep of all modules on its network
- Networks can be set up with unique keys, ensuring no clash between nearby operating networks.
- Can be used to control and alarm lifting actuators, engine control generators and pump.



Advanced Witness Systems Ltd © 2020

#### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

#### SUPPLIER INFORMATION

## CANBUS/MODBUS CONVERTER

- Sends out data held in Modbus registers as Canbus messages
- Canbus message ID matches the telemetry module ID
- Can be used to control and alarm lifting actuators, engine control generators and pumps using the Canbus message system



## WIRELESS TELEMETRY LOAD DISPLAY

- Performs advanced operations with telemetry module readings for local monitoring
- Can be configured to perform individual load link/ load cell measurements or in combinations to show such things as bow or stern load when lifting boats or as a total load measurement
- Range of 800m
- For more information, please see the Load Display Datasheet.



## EXTERNAL ANTENNA FOR GATEWAY ROUTER

- Replaces the Gateway Router's internal antenna for when the Gateway Router is mounted within a metal enclosure, so that the antenna can be mounted externally.
- 60cm cable attached to Antenna as standard, but additional 3m and 5m extensions are available.
- Range of 800m.



# WIRELESS TELEMETRY LOAD DISPLAY

## DESCRIPTION

The Wireless Telemetry Load Display allows users to perform advanced operations with load link and load cell readings for local monitoring. It can be configured to perform individual load link/ load cell measurements or in combinations to show such things as bow or stern load when lifting boats or as a total load measurement.




## SPECIFICATIONS

- Range of 800m
- Supports two modes of operation –
  - Pre-configured list (Define a set of up to 24 telemetry modules, such as load links, load pins etc. and configure overload and under load values)
  - Summing groups (Add the value of two or more telemetry modules together)
- Sealed to IP67 in a robust handheld enclosure
- ATEX version available

## FEATURES & BENEFITS

- Simple operator interface
- Overload indication and alarm
- User controlled backlight
- Tare/ Zero/ Gross functions
- Uses readily available Energizer L91 batteries
- Long battery life: 50 days at 12 sessions of 5 minutes per day; 54 hours continuous
- Operating temperature range of -10°C to +50°C

## DIMENSIONS

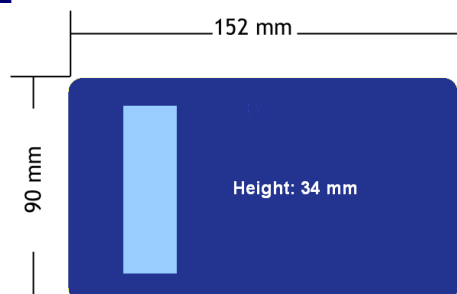

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION


Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION

# WIRELESS TELEMETRY LOAD LINK

## DESCRIPTION

The Wireless Telemetry Load Link is a strain gauged link with an inbuilt battery powered wireless transceiver which communicates with our AWS Wireless Telemetry Load Measurement System. With a simple to change extra-long life battery, and a large range of load capacities, it is ideal for applications in systems where running cables to a load link is not possible.

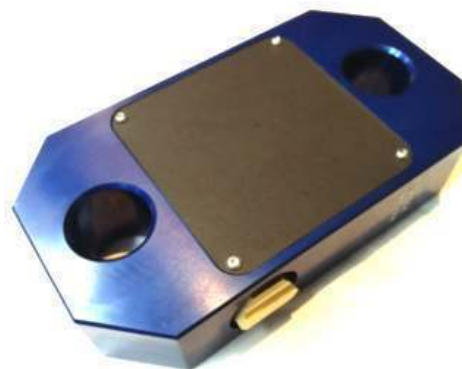

## SPECIFICATIONS

- Range 5 to 250 Tonne
- Transmission Distance up to 200m
- For use with standard shackles
- 5 Step Linearisation
- Auto Power Down
- Sealed to IP67
- Meets the CE RED directive, and FCC regulations.

## FEATURES & BENEFITS

- Long battery life
- Error free data transmission
- Active repeater to extend transmission range
- Remote on/off
- Environmentally sealed
- Internal aerial
- Other capacities available on request


Specifications		
Capacities	5-250	tonne
Radio Frequency	2.4	GHz
Accuracy (above 10% of FSD)	±0.05	% of reading
Compensated Temp. Range	-10 to +40	°C
Operating Temp. Range	-20 to +60	°C
Temp. Coefficient on Zero	<0.005	% FRO/°C
Temp. Coefficient on Span	<0.003	% FRO/°C
Safe Overload	150	%
Ultimate Overload	400	%
Insulation	>500 @100Vdc	MΩ
Environmental Protection	IP67	

Specifications subject to change without notice

## DIMENSIONS

Capacity (te)	A	B	C	DØ	E	Weight (Kg)
5	137	105	41.5	30	193	1.5
12	149	105	41.5	38	239	2.0
25	160	125	55	53	284	4.5
35	175	138	55	60	335	5.5
50	198	150	75	73	375	10.0
100	275	220	120	100	500	28.0
150	300	260	120	110	550	50.0
200	325	290	159	135	660	75.0
250	365	304	189	145	720	90.0

All dimensions in mm

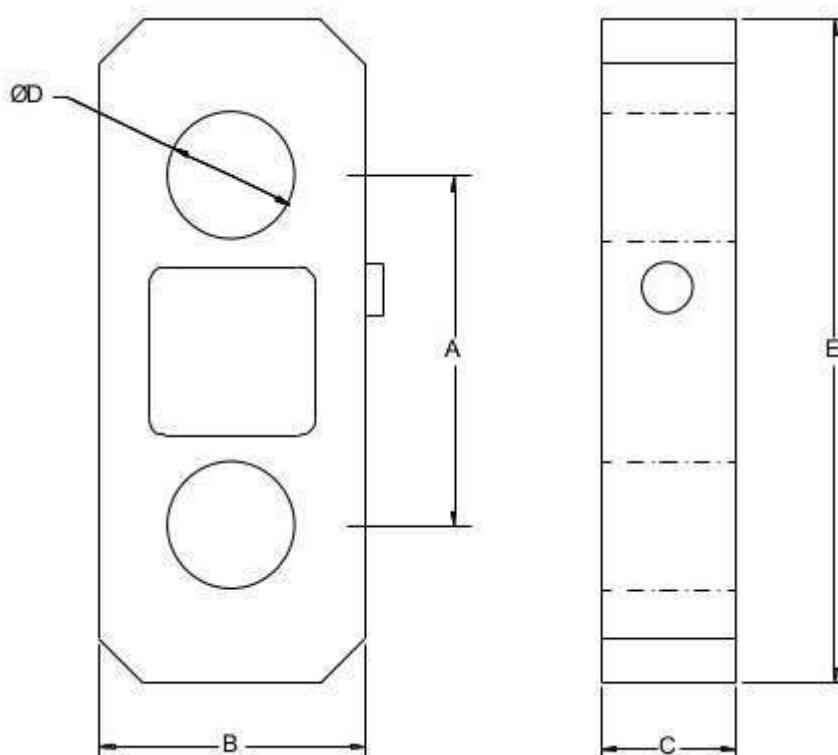

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont business Centre  
Beaumont Close  
Banbury  
Ox16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION

Data was correct at time of publication.  
Catalogue Page 58

# WIRELESS TELEMETRY LOAD PIN

## DESCRIPTION

The Wireless Telemetry Load Pin is a strain gauged pin with a local battery powered wireless transceiver which communicates with our AWS Wireless Telemetry Load Measurement System. With a simple to change extra-long life battery, and a large range of load capacities, it is ideal for applications in systems where running cables to a load pin is not possible. The transceiver can be mounted within 3m of the Load Pin, in an easy to access location for battery changing.



## SPECIFICATIONS


- Stainless Steel
- Strain Gauged Internally
- Capacity 25 Te
- 5 Step Linearisation
- 3m cable from Load Pin to its transceiver
- Auto Power Down
- Transmission Distance up to 200m
- Sealed to IP67
- Meets the CE RED directive, & FCC regulations.

## FEATURES & BENEFITS

- Long battery life
- Error free data transmission
- Active repeater to extend transmission range
- Remote on/off
- Environmentally sealed
- Other capacities available on request

Specification		
Capacity	5-1000	tonne
Radio Frequency	2.4	GHz
Accuracy (above 10% of FSD)	±0.05	% of reading
Compensated Temp. Range	-10 to +40	°C
Operating Temp. Range	-20 to +60	°C
Temp. Coefficient on Zero	<0.005	% FRO/°C
Temp Coefficient on Span	<0.003	% FRO/°C
Safe Overload	150	%

## DIMENSIONS

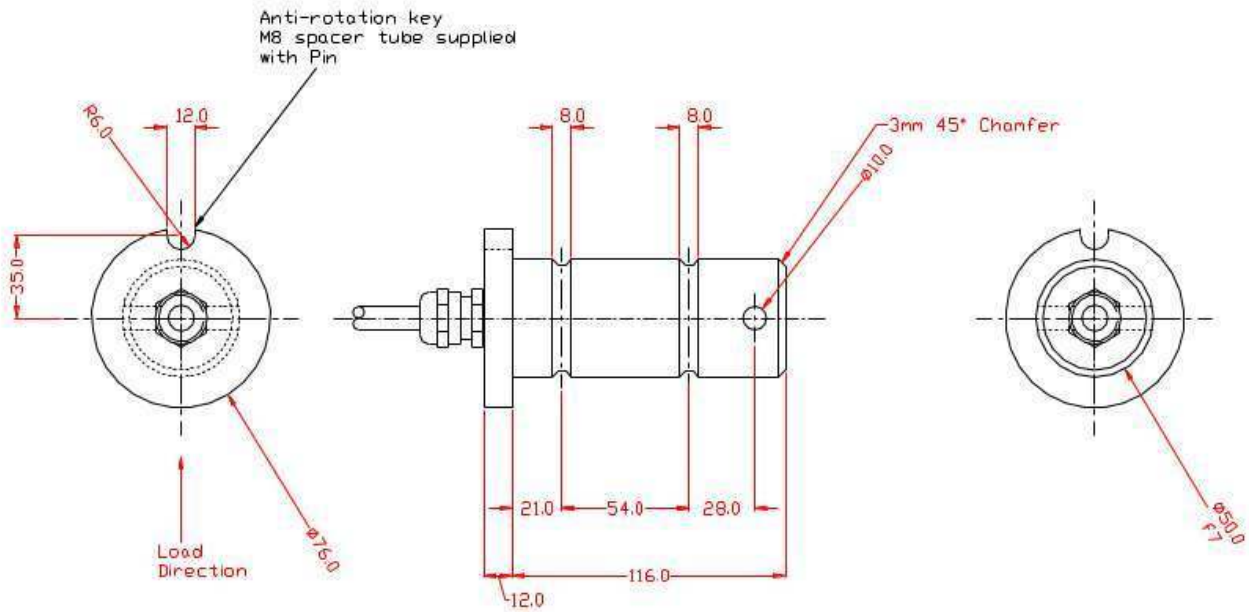

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION

Data was correct at time of publication.  
Catalogue Page 60



# WIRELESS TELEMETRY ANTI 2-BLOCK

## DESCRIPTION

The Wireless Telemetry Anti 2-Block is an Anti 2-Block detector with a local battery powered wireless transceiver which communicates with our AWS Wireless Telemetry Load Measurement System. It is ideal for applications in systems where running cables to an Anti 2-Block is not possible. The transceiver can be mounted within 3m of the Anti 2-Block, in an easy to access location for battery changing. It can be supplied with or without its weight & chain.



## SPECIFICATIONS


- Robust construction for reliability
- Fully weatherproof
- Fail safe operation
- 5 & 10kg bob-weight options
- 3m cable from Anti 2-Block to its transceiver
- ATEX version available
- Simple to install
- Auto power down
- Transmission distance up to 200m
- Meets the CE RED directive, and FCC regulations.

## FEATURES & BENEFITS

- Long battery life
- Error free data transmission
- Active repeater to extend transmission range
- Remote on/off
- Environmentally sealed
- Contacts are broken mechanically
- Unit pivots from boom head & always follows the angle of the hoist rope



## DIMENSIONS

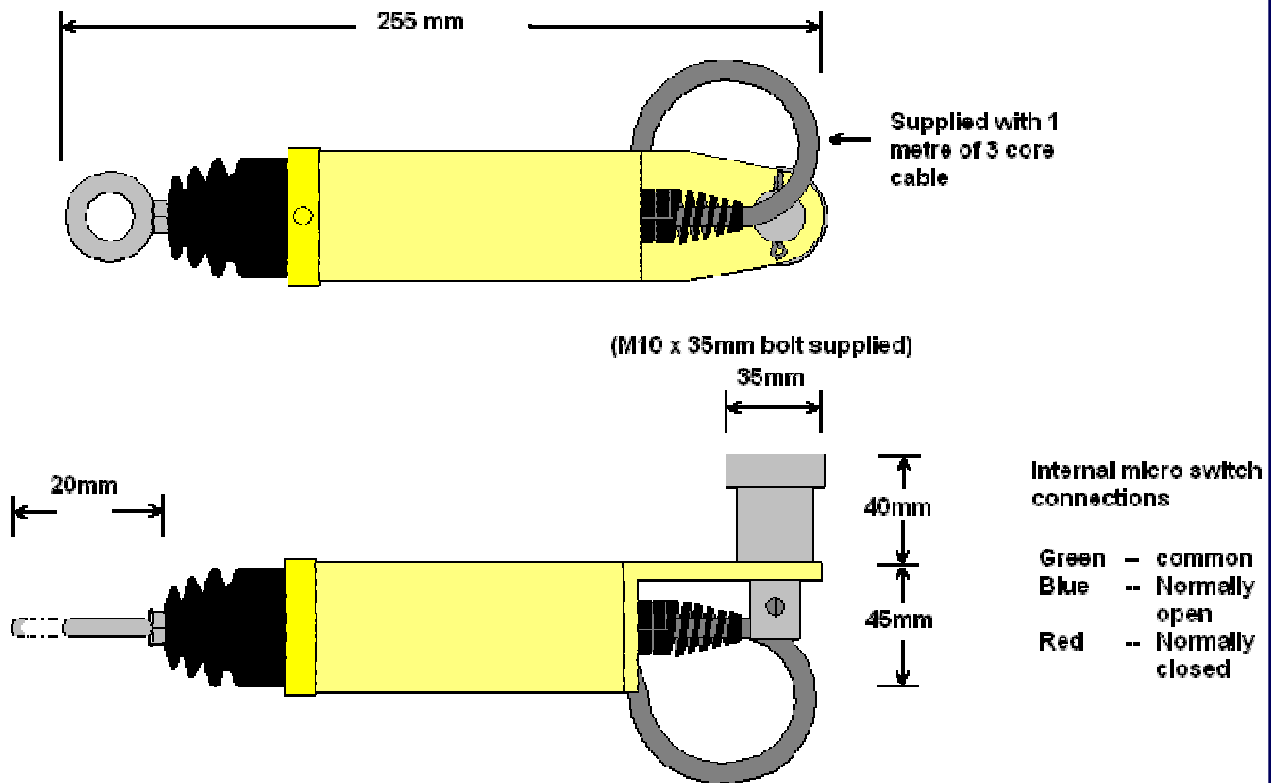

Advanced Witness Systems Ltd © 2020

### MANUFACTURER INFORMATION

Advanced Witness Systems Ltd  
Unit 8  
Beaumont Business Centre  
Beaumont Close  
Banbury  
OX16 1TN  
Tel: 01295 266939  
Email: sales@awstorque.co.uk

### SUPPLIER INFORMATION



## **Advanced Witness Systems Ltd**

Unit 8, Beaumont Business Centre, Beaumont Close  
Banbury, Oxfordshire  
OX16 1TN

Telephone: 01295 266939

Fax: 01295 263503

[sales@awstorque.co.uk](mailto:sales@awstorque.co.uk)

[www.awstorque.co.uk](http://www.awstorque.co.uk)